Wall

Star DL1220

Wall light

Wall light.

- Ceiling cut-out Ø32 mm
- LED source: Citizen

Voltage **max 3 V, 24 V DC**	Luminous flux **50 / 110 lm**	Colour temperature **2700 K, 3000 K, 4000 K**
CRI **97 CRI**	IP rating **IP65**	Certifications **CE**
Mounting **Recessed, Wall**	Finishes **White, Black**	

Models

Code	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1220	max 3 V, 24 V DC	50 / 110 lm	97 CRI	37 × 37 × 32 mm; housing Ø31/Ø36 × 45 mm	Ø32 mm	350 / 700 mA

Finishes

Black

White

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1220, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1220, wide distribution

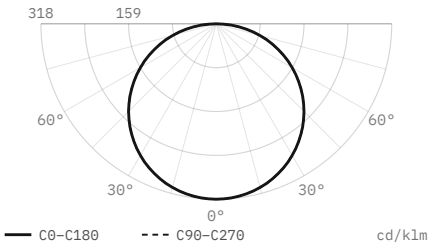

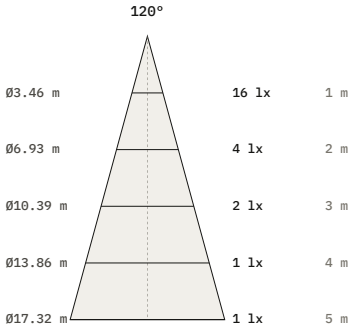

Luminous flux	50 lm
Peak intensity	16 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	37 × 37 × 32 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.