


Outdoor

Stone


Outdoor luminaire

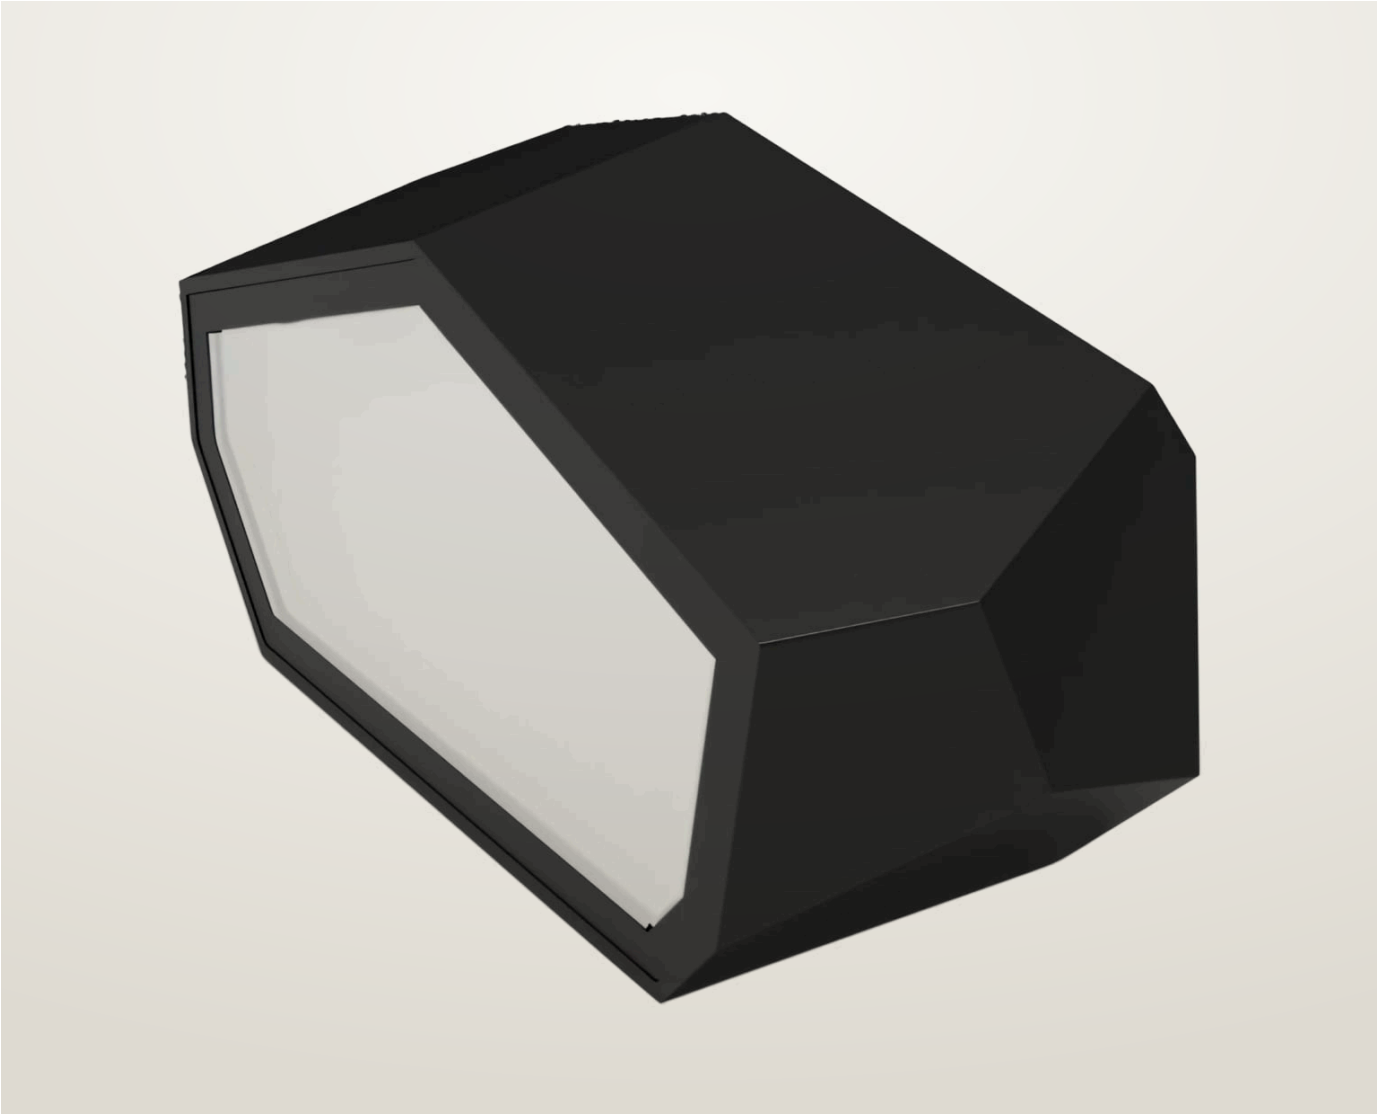

Outdoor luminaire. 5 W. 3000, 4000 K. IP65/66/67. — LED source: Citizen
97 CRI.

Power 5 W	Voltage 24 V DC, 100–305 V AC, 90–305 V AC, 200–240 V AC, 100–240 V AC	Colour temperature 3000 K, 4000 K
CRI 97 CRI	IP rating IP65/66/67	Mounting Wall
Control On/Off, DALI, Triac	Finishes Black	

Dimensions

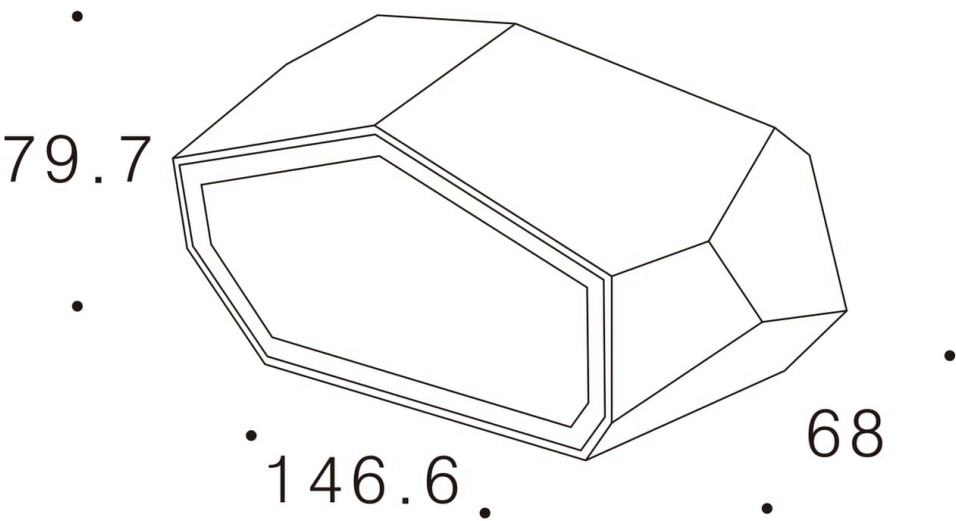


Models

Code	Version	Power	Voltage	CRI	Size
WA-Stone-0501		5 W	24 V DC	97 CRI	146.6 × 79.7 × 68 mm
OUT-Stone-P01	Driver, ON/OFF		100–305 V AC	97 CRI	
OUT-Stone-P02	Driver, DALI		90–305 V AC	97 CRI	
OUT-Stone-P03	Driver, 0–10 V/1–10 V		200–240 V AC	97 CRI	
OUT-Stone-P04	Driver, triac		200–240 V AC	97 CRI	
OUT-Stone-P05	Driver, DALI		100–240 V AC	97 CRI	

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WA-Stone-0501, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

WA-Stone-0501, 5 W, wide distribution

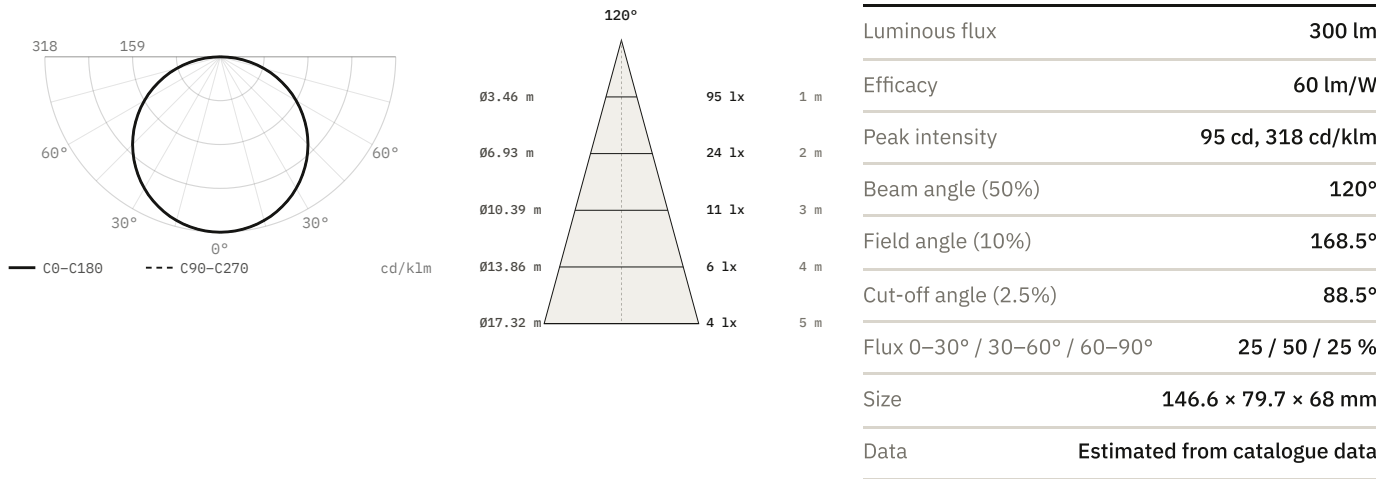

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.