Ceiling

M1 Marble

Surface luminaire




Surface luminaire. 8 W. 110° beam. 1600, 2700 K. IP65. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
8 W	36 V	1600 K, 2700 K
CRI	**Beam angles**	**IP rating**
97 CRI	110°	IP65
Mounting	**Control**	**Finishes**
Surface	On/Off	White

Dimensions

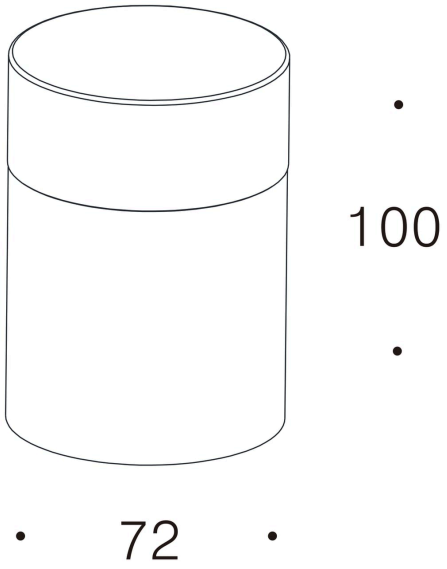


Models


Code	Version	Power	Voltage	CRI	Size	Beam	Notes
SU-M1-1504-2G	1600–2600 K	8 W	36 V	97 CRI	Ø72 × 100 mm	110°	200 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SU-M1-1504-2G, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SU-M1-1504-2G, 8 W, 110° beam

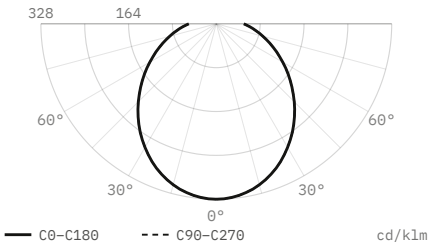

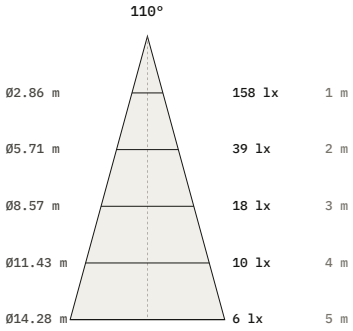

Luminous flux	480 lm
Efficacy	60 lm/W
Peak intensity	158 cd, 328 cd/klm
Beam angle (50%)	110°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	25 / 46.2 / 28.8 %
Size	Ø72 × 100 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.