
Ceiling

M22 1208

Surface luminaire

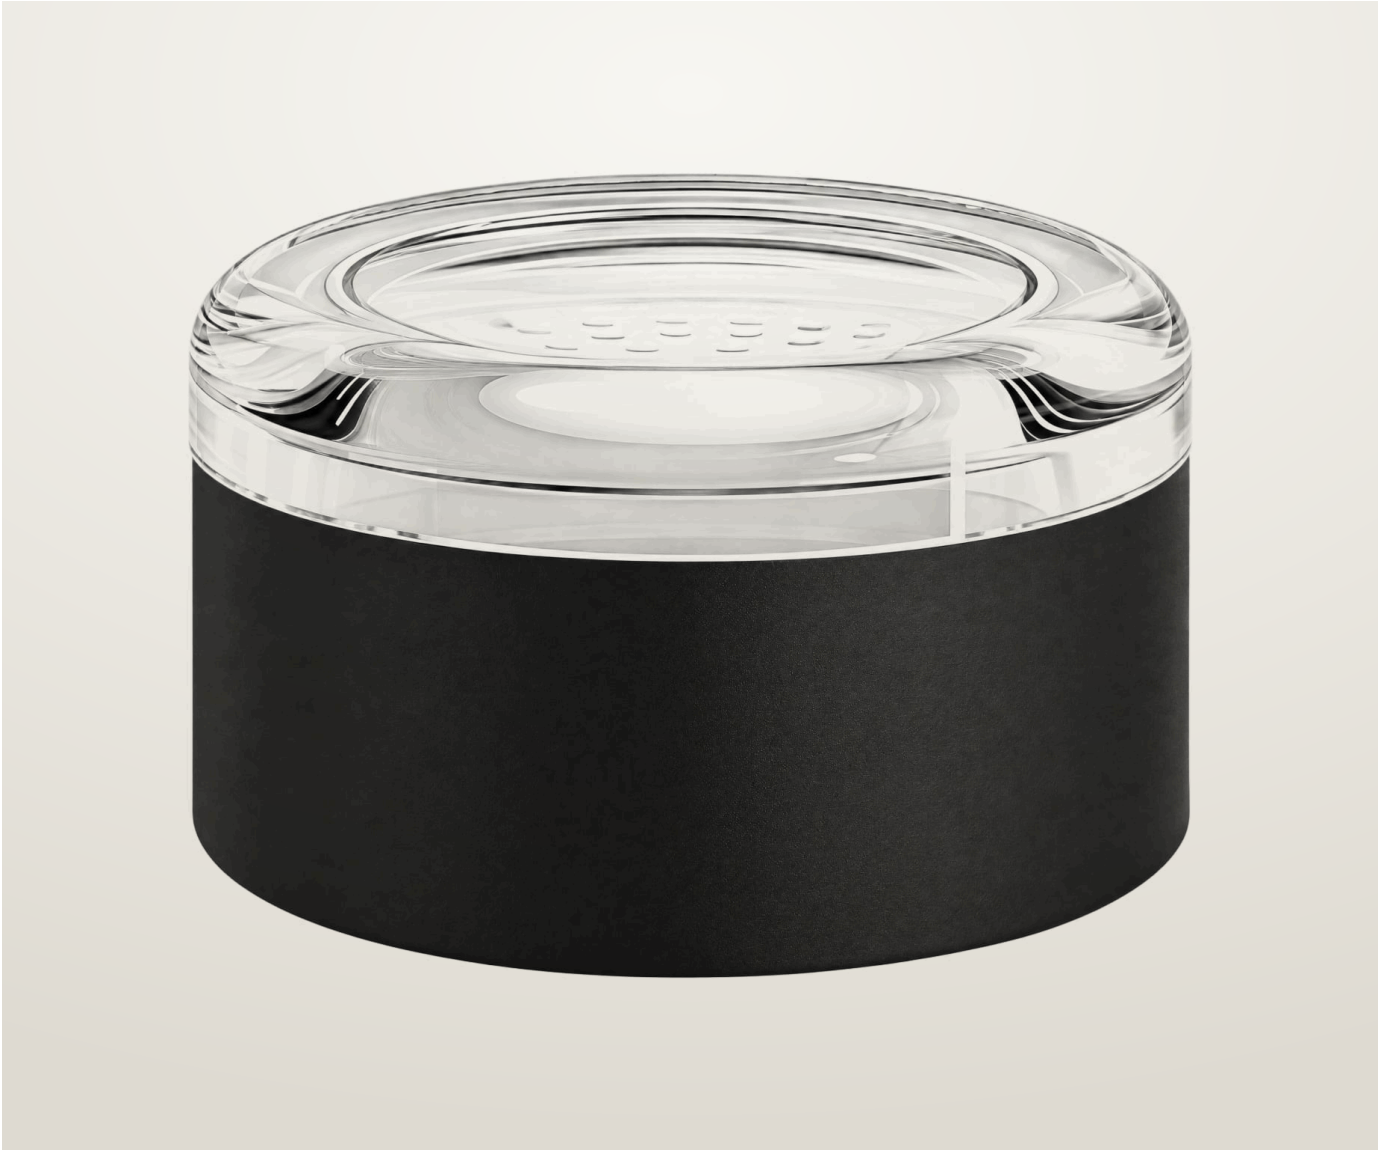


Surface luminaire. 6 W. 110° beam. 2700, 3000, 4000, 5000 K. IP54. 97 CRI.

- LED source: Citizen

Power **6 W**	Voltage **36 V**	Colour temperature **2700 K, 3000 K, 4000 K, 5000 K**
CRI **97 CRI**	Beam angles **110°**	IP rating **IP54**
Mounting **Surface**	Control **On/Off**	Finishes **White, Black, Silver, Brass, Bronze**

Dimensions

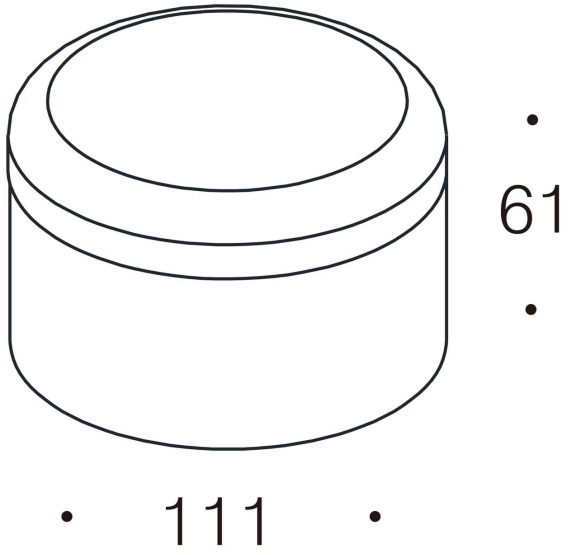


Models


Code	Power	Voltage	CRI	Size	Beam	Notes
SU-M22-1208	6 W	36 V	97 CRI	Ø111 × 61 mm	110°	150 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SU-M22-1208, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SU-M22-1208, 6 W, 110° beam

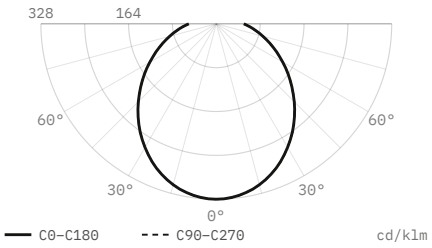

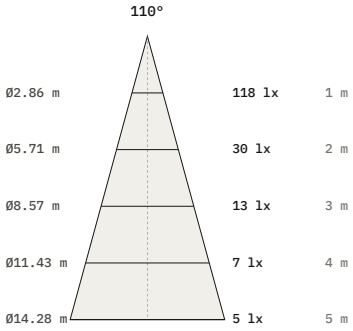

Luminous flux	**360 lm**
Efficacy	**60 lm/W**
Peak intensity	**118 cd, 328 cd/klm**
Beam angle (50%)	**110°**
Cut-off angle (2.5%)	**90°**
Flux 0–30° / 30–60° / 60–90°	**25 / 46.2 / 28.8 %**
Size	**Ø111 × 61 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.