Downlights

Global 15B 8° Trimless

Recessed spotlight




Recessed spotlight. 6 W. 8° beam. 2700, 3000, 4000, 5000 K. 97 CRI.

- Ceiling cut-out Ø72 mm
- LED source: Citizen

Power	Voltage	Colour temperature
6 W	36 V	2700 K, 3000 K, 4000 K, 5000 K
CRI	**Beam angles**	**IP rating**
97 CRI	8°	IP20
Mounting	**Control**	**Finishes**
Recessed	On/Off	White

Dimensions

TL-Global-15B-8D



⌀100



⌀72


Models


Code	Power	Voltage	CRI	Size	Cut-out	Beam	Notes
TL-Global-15B-8D	6 W	36 V	97 CRI	Ø100 × 83 mm	Ø72 mm	8°	150 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TL-Global-15B-8D, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TL-Global-15B-8D, 6 W, 8° beam

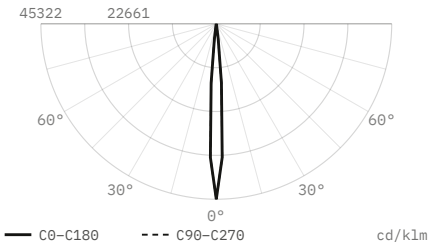

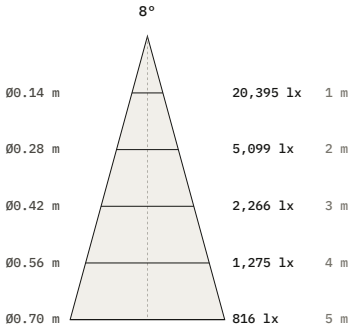

Luminous flux	450 lm
Efficacy	75 lm/W
Peak intensity	20,395 cd, 45,322 cd/klm
Beam angle (50%)	8°
Field angle (10%)	14.6°
Cut-off angle (2.5%)	9°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø100 × 83 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.