Downlights

M1 1510 Trimless

Recessed spotlight




Recessed spotlight. 15 W. 50° beam. 2700, 3000, 4000, 5000 K. 97 CRI.

- Ceiling cut-out Ø85 mm
- LED source: Citizen

Power	Voltage	Colour temperature
15 W	36 V	2700 K, 3000 K, 4000 K, 5000 K
CRI	**Beam angles**	**IP rating**
97 CRI	50°	IP20
Mounting	**Control**	**Finishes**
Recessed	On/Off	White

Dimensions

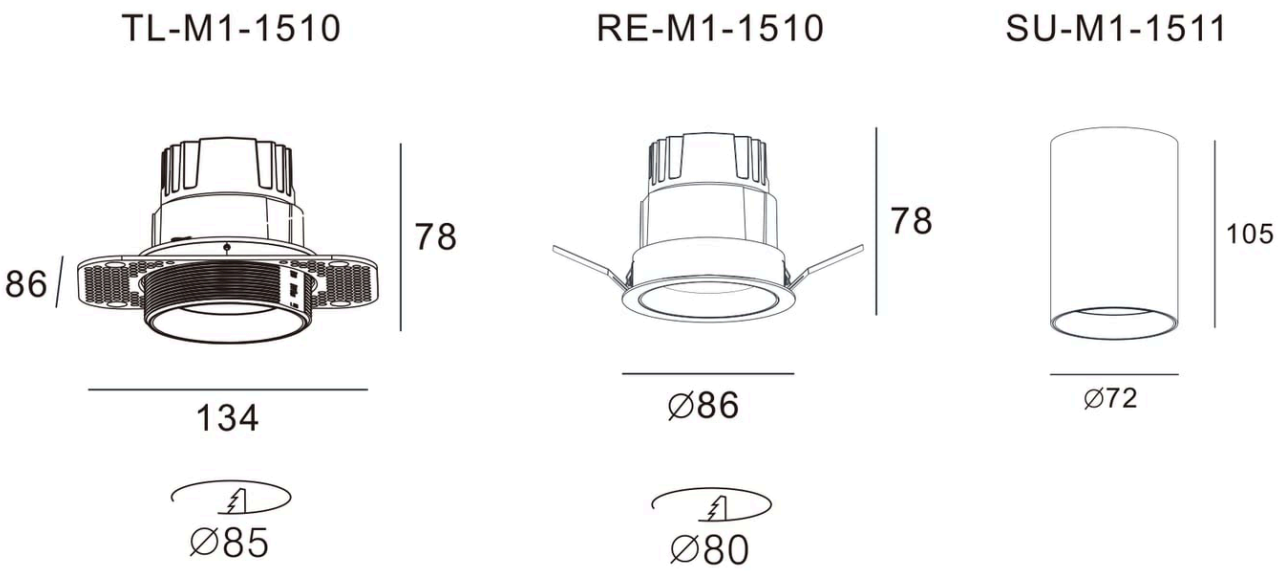


Models


Code	Power	Voltage	CRI	Size	Cut-out	Beam	Notes
TL-M1-1510	15 W	36 V	97 CRI	134 × 86 × 78 mm	Ø85 mm	50°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TL-M1-1510, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TL-M1-1510, 15 W, 50° beam

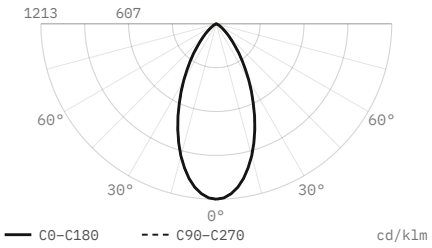

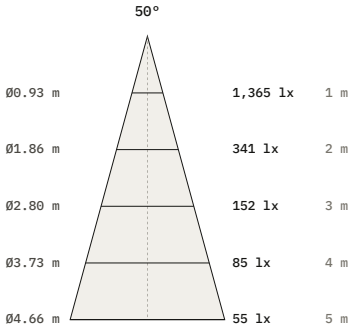

Luminous flux	**1,125 lm**
Efficacy	**75 lm/W**
Peak intensity	**1,365 cd, 1,213 cd/klm**
Beam angle (50%)	**50°**
Field angle (10%)	**91.1°**
Cut-off angle (2.5%)	**57.5°**
Flux 0–30° / 30–60° / 60–90°	**64.8 / 33.6 / 1.5 %**
Size	**134 × 86 × 78 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.