

Suspended

Tour TR0101

Pendant




Pendant. 4 W. 35° or 50° beam. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 4 W	Voltage 48 V DC	Luminous flux 320 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 35°, 50°
IP rating IP20	Certifications CE, Class III	Mounting Suspended, Magnetic track
Finishes Black		

Dimensions

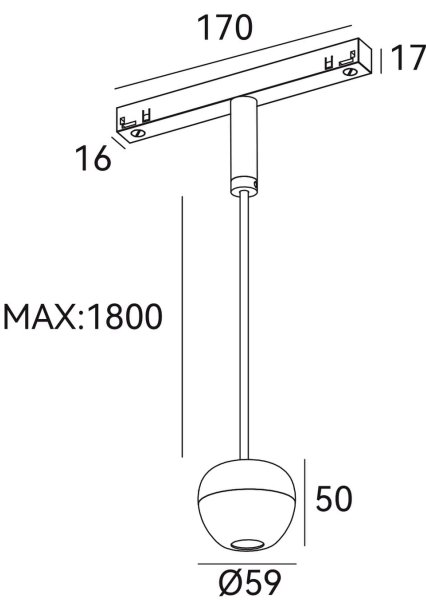


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
TR0101	4 W	48 V DC	320 lm	97 CRI	Ø59 × 50 mm	35° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0101, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0101, 4 W, 35° beam

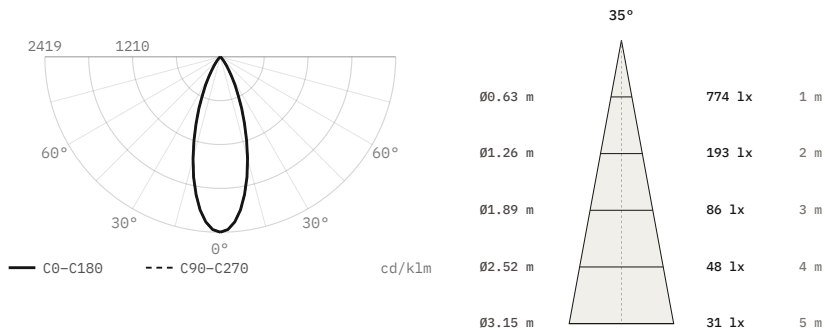

TR0101, 4 W, 50° beam

