Track spotlights

Tour TR0109

Track spotlight

Track spotlight. 18 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **18 W**	Voltage **48 V DC**	Luminous flux **1300 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE, Class III**	Mounting **Magnetic track**
Finishes **Black**		

Models

Code	Power	Voltage	Flux	CRI	Size	Beam
TR0109	18 W	48 V DC	1300 lm	97 CRI	Ø60 × 175 mm	15° 24° 36° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0109, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0109, 18 W, 15° beam

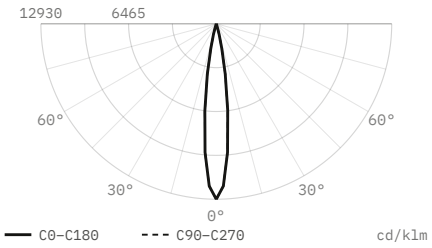

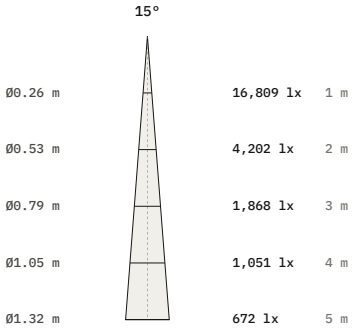

Luminous flux	1,300 lm
Efficacy	72 lm/W
Peak intensity	16,809 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø60 × 175 mm
Data	Calculated from catalogue data

TR0109, 18 W, 24° beam

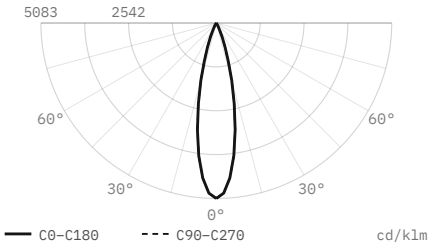

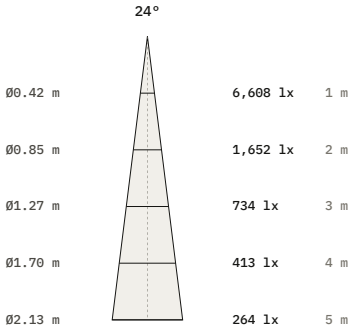

Luminous flux	1,300 lm
Efficacy	72 lm/W
Peak intensity	6,608 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø60 × 175 mm
Data	Calculated from catalogue data

TR0109, 18 W, 36° beam

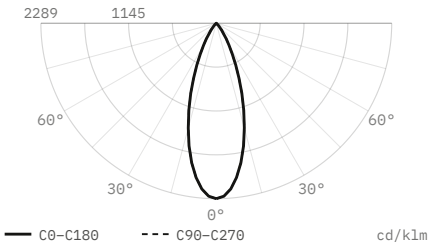

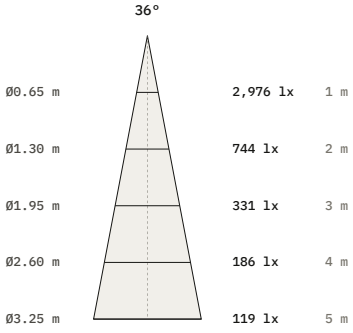

Luminous flux	1,300 lm
Efficacy	72 lm/W
Peak intensity	2,976 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø60 × 175 mm
Data	Calculated from catalogue data

TR0109, 18 W, 50° beam

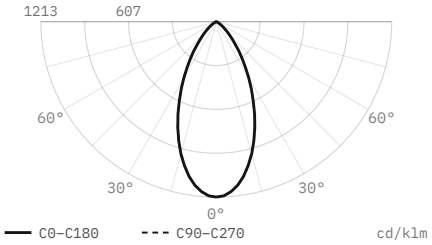

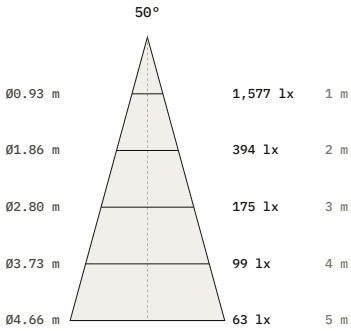

Luminous flux	1,300 lm
Efficacy	72 lm/W
Peak intensity	1,577 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø60 × 175 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.