

Linear

Tour TR0207

Linear track luminaire




Linear track luminaire. 15 W. Three beam angles, 24° to 90°. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 15 W	Voltage 48 V DC	Luminous flux 1180 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 24°, 36°, 90°
IP rating IP20	Certifications CE, Class III	Mounting Magnetic track
Finishes Black		

Dimensions

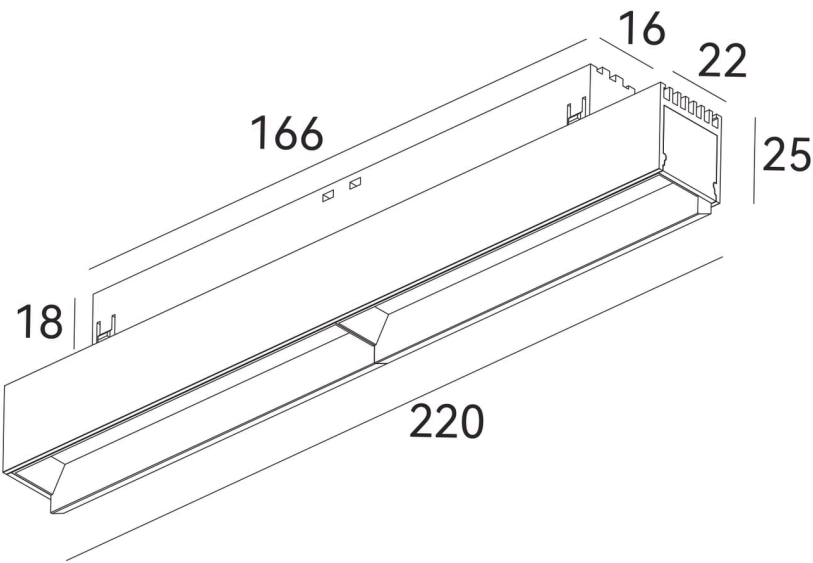


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Beam
TR0207	Wall washer	15 W	48 V DC	1180 lm	97 CRI	L220 x W22 x H25 mm	24° 36° 90°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0207, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0207, 15 W, wall washer

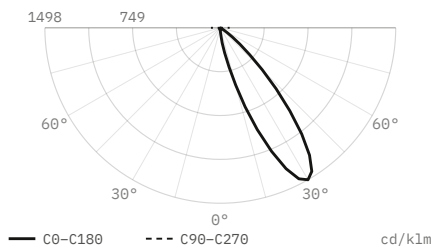


Luminous flux	1,180 lm
Efficacy	79 lm/W
Peak intensity	1,767 cd, 1,498 cd/k1m
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	20.7 / 68.8 / 10.5 %
Size	220 × 22 × 25 mm
Data	Calculated from catalogue data

TR0207, 15 W, wall washer

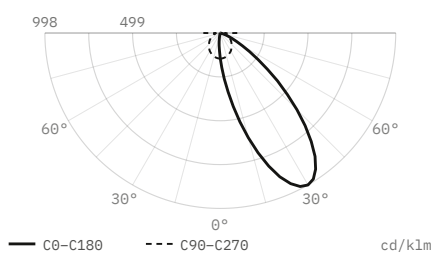

Luminous flux	1,180 lm
Efficacy	79 lm/W
Peak intensity	1,178 cd, 998 cd/k1m
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23.3 / 62.5 / 14.1 %
Size	220 × 22 × 25 mm
Data	Calculated from catalogue data

TR0207, 15 W, wall washer

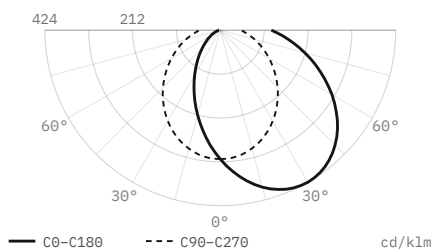

Luminous flux	1,180 lm
Efficacy	79 lm/W
Peak intensity	500 cd, 424 cd/k1m
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	24.2 / 47.2 / 28.6 %
Size	220 × 22 × 25 mm
Data	Calculated from catalogue data