

Linear

TR0200

Linear track luminaire




Linear track luminaire. 14 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 14 W	Voltage 230 V AC	Luminous flux 1080 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 24°, 36°
IP rating IP20	Certifications CE	Mounting Magnetic track
Finishes Black		

Dimensions

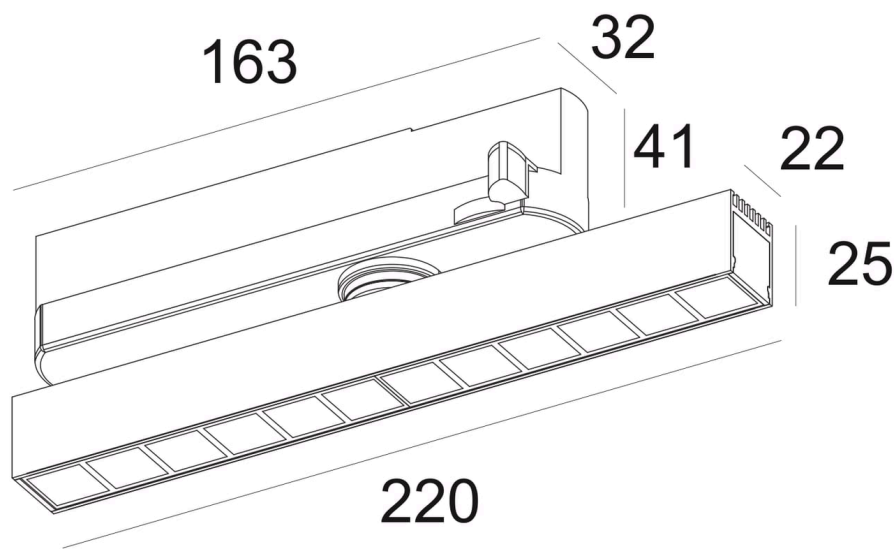


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
TR0200	14 W	230 V AC	1080 lm	97 CRI	Head L220 × 22 × 25 mm; adapter L163 × W32 × H41 mm	24° 36°

Finishes



Black




White

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0200, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0200, 14 W, 24° beam

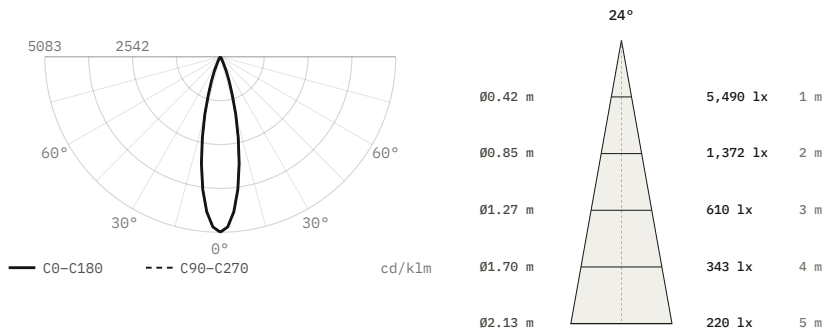

Luminous flux	1,080 lm
Efficacy	77 lm/W
Peak intensity	5,490 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	220 × 0 mm
Data	Calculated from catalogue data

TR0200, 14 W, 36° beam

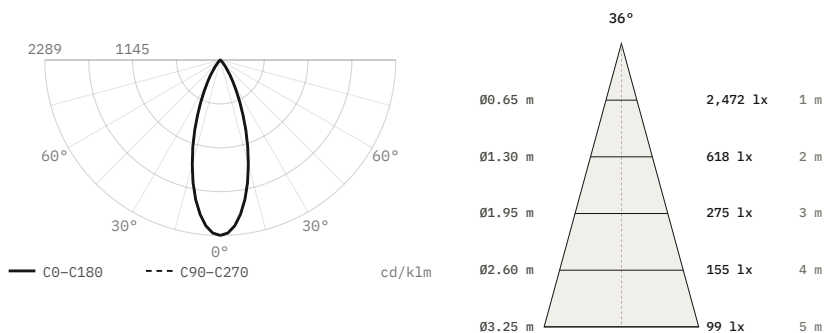

Luminous flux	1,080 lm
Efficacy	77 lm/W
Peak intensity	2,472 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	220 × 0 mm
Data	Calculated from catalogue data