


Linear

TR0201

Linear track luminaire

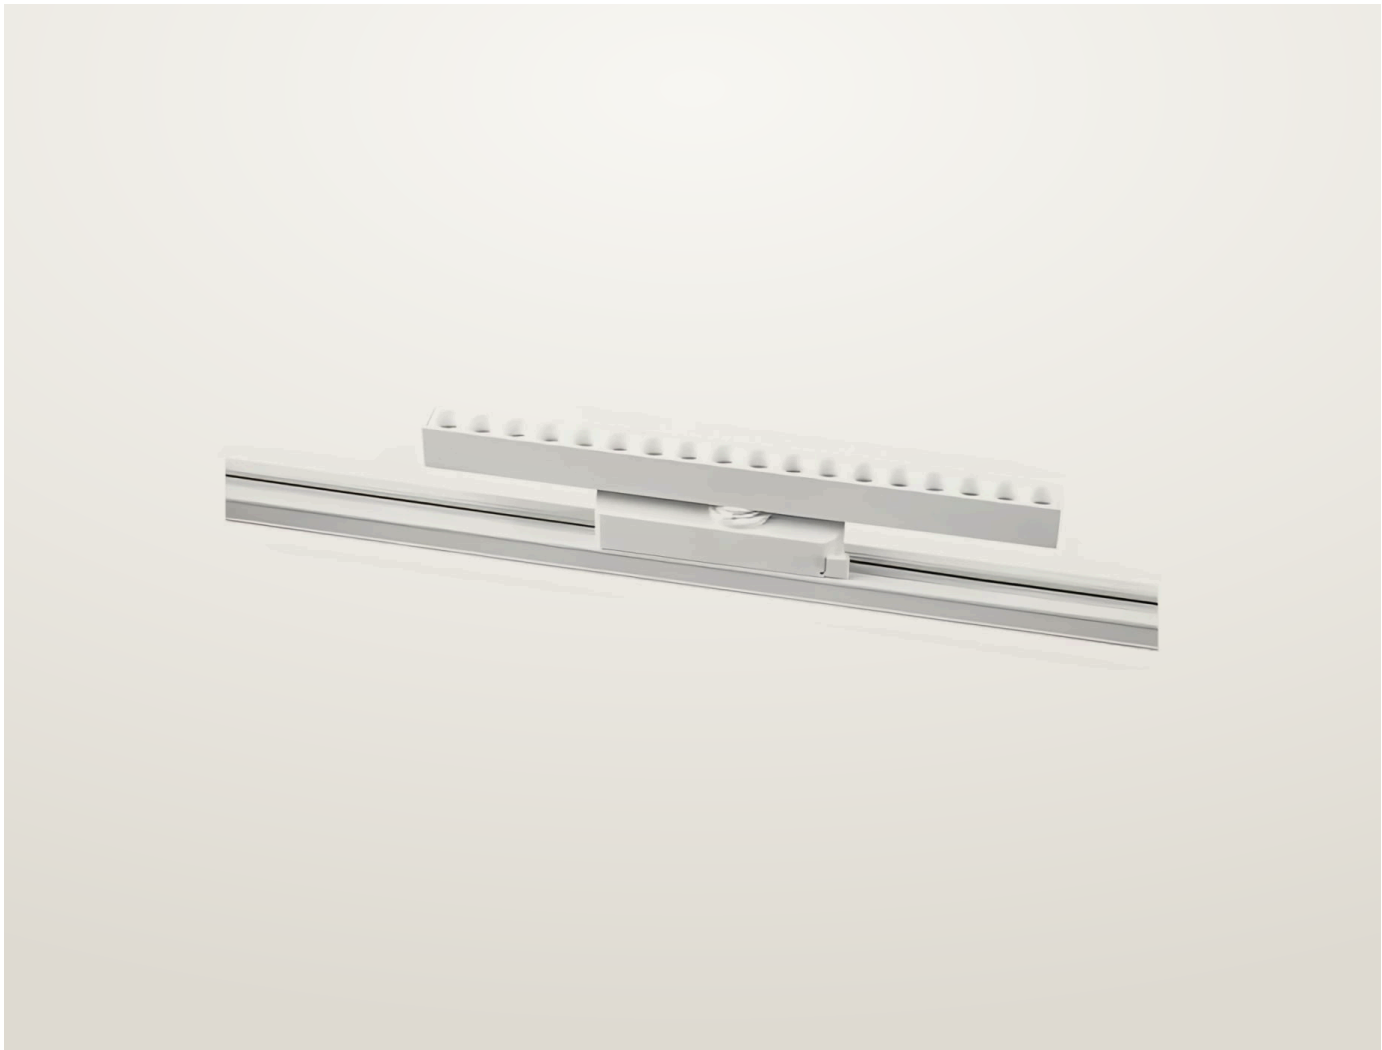

Linear track luminaire. 20 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 20 W	Voltage 230 V AC	Luminous flux 1620 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 24°, 36°
IP rating IP20	Certifications CE	Mounting Magnetic track
Finishes White		


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
TR0201	20 W	230 V AC	1620 lm	97 CRI	Head L328 × 22 × 25 mm; adapter L163 x W32 x H41 mm	24° 36°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0201, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0201, 20 W, 24° beam

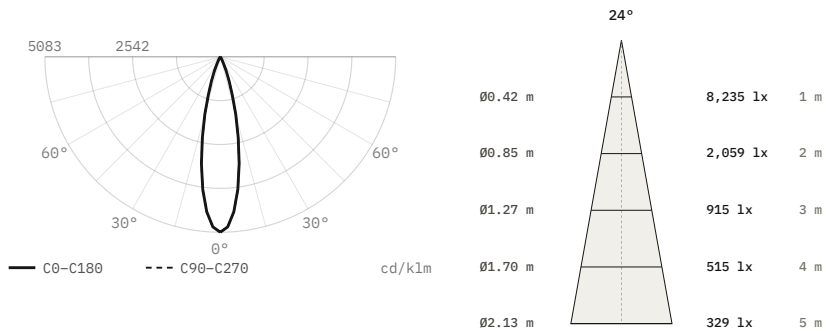

Luminous flux	1,620 lm
Efficacy	81 lm/W
Peak intensity	8,235 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	328 × 0 mm
Data	Calculated from catalogue data

TR0201, 20 W, 36° beam

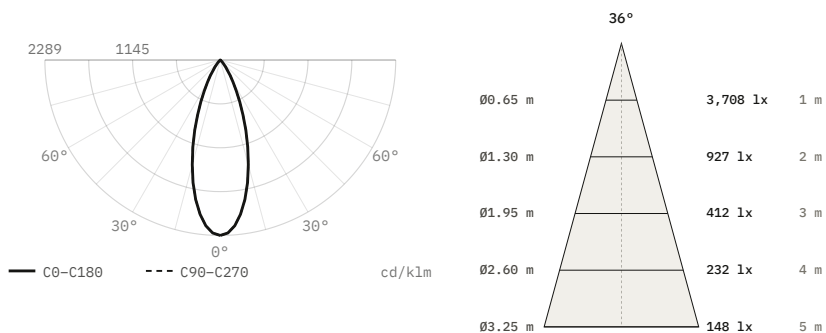

Luminous flux	1,620 lm
Efficacy	81 lm/W
Peak intensity	3,708 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	328 × 0 mm
Data	Calculated from catalogue data