

Track spotlights

TR0210

Track spotlight




Track spotlight. 26 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 26 W	Voltage 230 V AC	Luminous flux 1760 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 24°, 36°
IP rating IP20	Certifications CE	Mounting Magnetic track
Finishes Black		

Dimensions

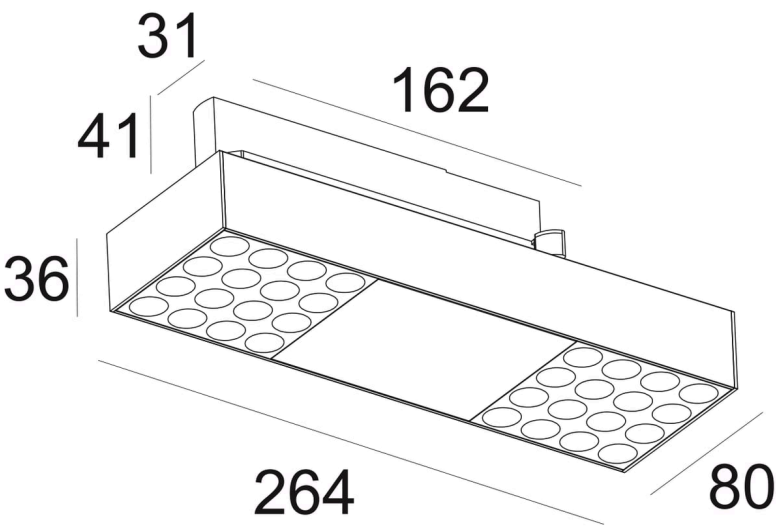


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
TR0210	26 W	230 V AC	1760 lm	97 CRI	Head L264 x W80 x H36 mm; adapter L162 x W31 x H41 mm	24° 36°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0210, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0210, 26 W, 24° beam

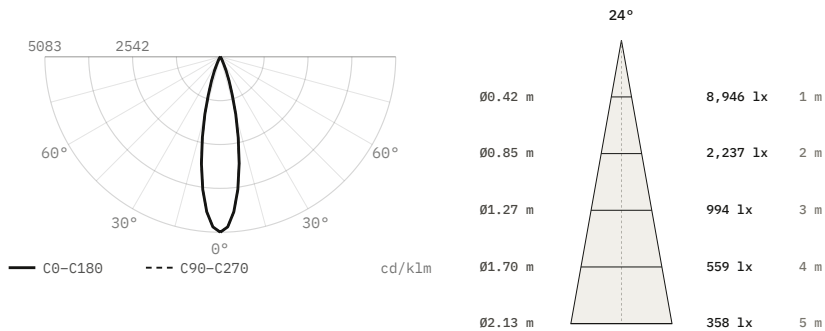

Luminous flux	1,760 lm
Efficacy	68 lm/W
Peak intensity	8,946 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	264 × 80 × 36 mm
Data	Calculated from catalogue data

TR0210, 26 W, 36° beam

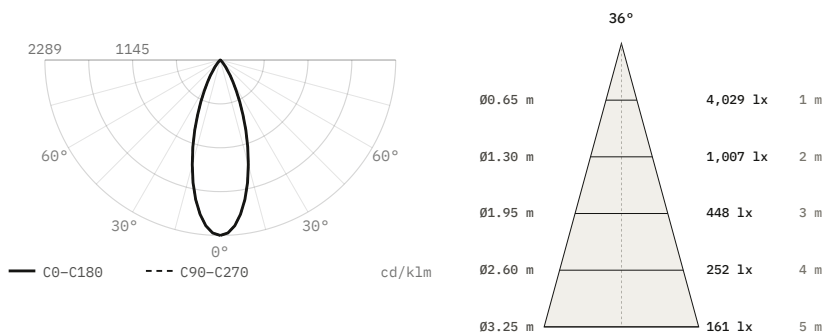

Luminous flux	1,760 lm
Efficacy	68 lm/W
Peak intensity	4,029 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	264 × 80 × 36 mm
Data	Calculated from catalogue data