

Track spotlights

Track TR0122-0129 TR0125

Track spotlight



Track spotlight. 15 W. Four beam angles, 15° to 50°. — LED source: Citizen
2700, 3000, 4000 K. 97 CRI.

Power 15 W	Voltage 230 V AC	Luminous flux 1170 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°
IP rating IP20	Certifications CE	Mounting Magnetic track
Control On/Off	Finishes White, Black	


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
TR0125	15 W	230 V AC	1170 lm	97 CRI	Tube Ø50 × 150 mm; adapter 131 × 34 × 38 mm	15° 24° 36° 50°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0125, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0125, 15 W, 15° beam

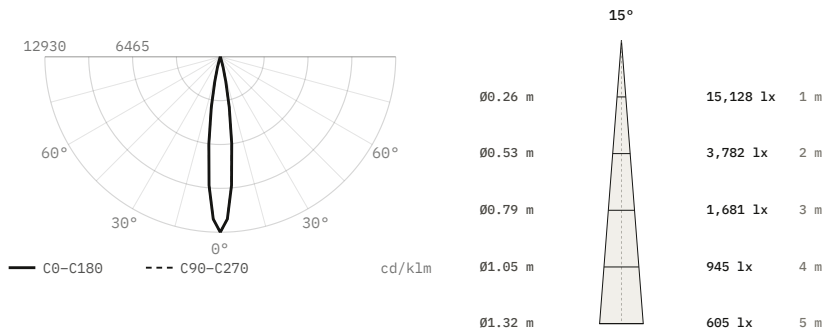


Luminous flux	1,170 lm
Efficacy	78 lm/W
Peak intensity	15,128 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø50 × 150 mm
Data	Calculated from catalogue data

TR0125, 15 W, 24° beam

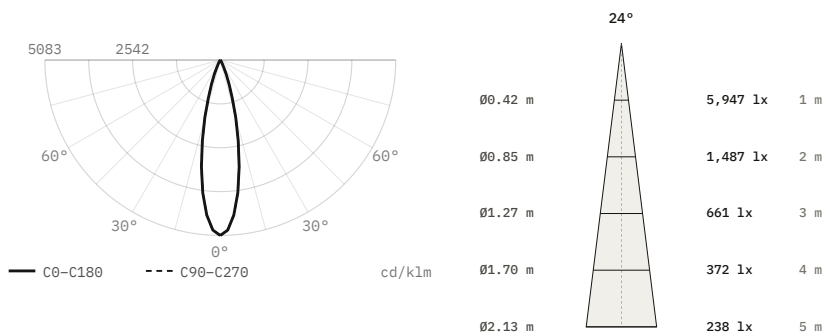


Luminous flux	1,170 lm
Efficacy	78 lm/W
Peak intensity	5,947 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø50 × 150 mm
Data	Calculated from catalogue data

TR0125, 15 W, 36° beam

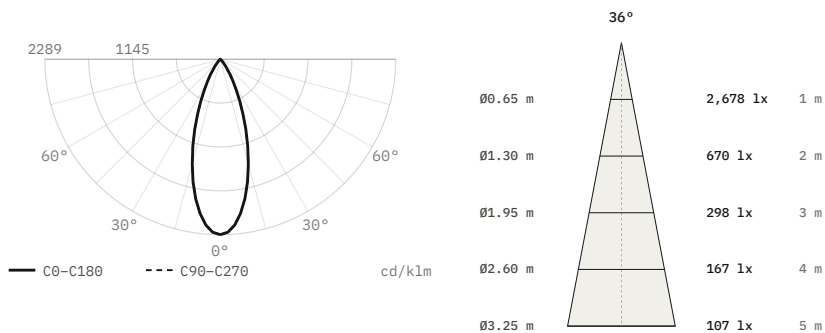

Luminous flux	1,170 lm
Efficacy	78 lm/W
Peak intensity	2,678 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø50 × 150 mm
Data	Calculated from catalogue data

TR0125, 15 W, 50° beam

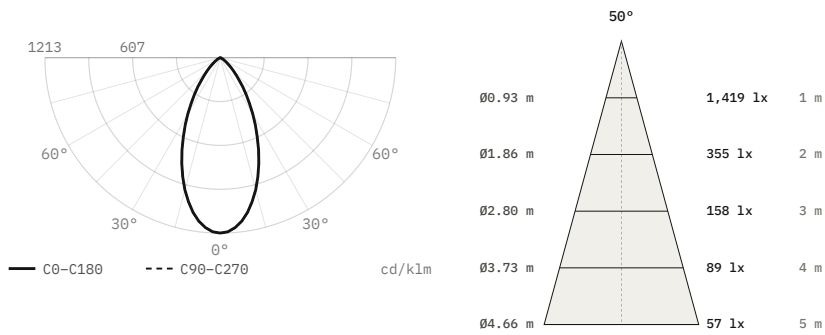

Luminous flux	1,170 lm
Efficacy	78 lm/W
Peak intensity	1,419 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø50 × 150 mm
Data	Calculated from catalogue data