

Track spotlights

Track TR0122-0129 TR0129

Track spotlight



Track spotlight. 30 W. Four beam angles, 15° to 50°. — LED source: Citizen
2700, 3000, 4000 K. 97 CRI.

Power 30 W	Voltage 230 V AC	Luminous flux 2600 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°
IP rating IP20	Certifications CE	Mounting Magnetic track
Control On/Off	Finishes White, Black	


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
TR0129	30 W	230 V AC	2600 lm	97 CRI	Tube 60 × 200 mm; adapter 131 × 34 × 38 mm	15° 24° 36° 50°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0129, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0129, 30 W, 15° beam

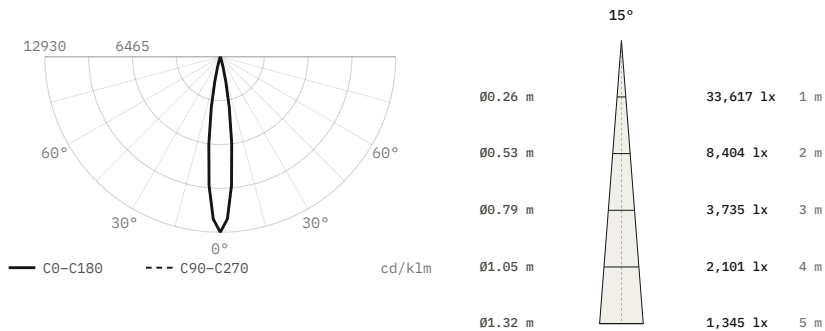


Luminous flux	2,600 lm
Efficacy	87 lm/W
Peak intensity	33,617 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	200 × 60 mm
Data	Calculated from catalogue data

TR0129, 30 W, 24° beam

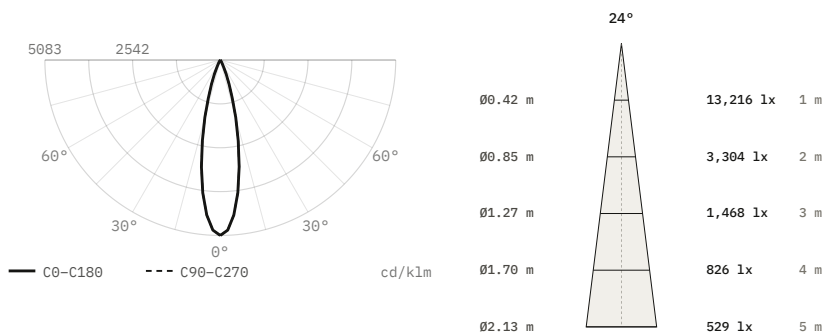


Luminous flux	2,600 lm
Efficacy	87 lm/W
Peak intensity	13,216 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	200 × 60 mm
Data	Calculated from catalogue data

TR0129, 30 W, 36° beam

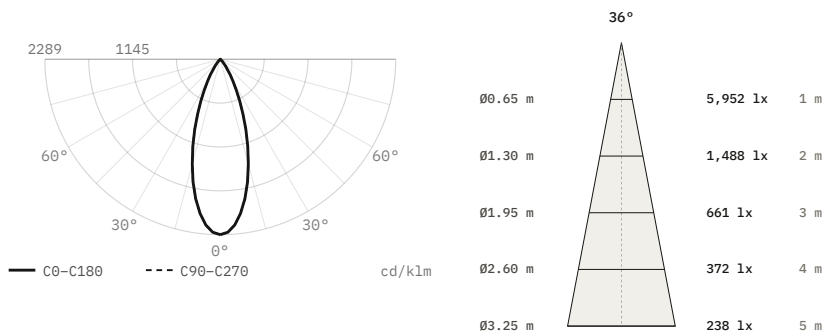

Luminous flux	2,600 lm
Efficacy	87 lm/W
Peak intensity	5,952 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	200 × 60 mm
Data	Calculated from catalogue data

TR0129, 30 W, 50° beam

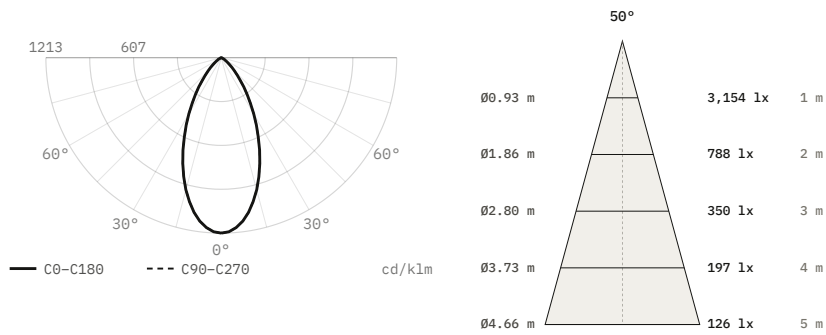

Luminous flux	2,600 lm
Efficacy	87 lm/W
Peak intensity	3,154 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	200 × 60 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.