

Track spotlights

Track

Track spotlight




Track spotlight. 26 W. Four beam angles, 15° to 50°. 97 CRI.

— LED source: Citizen

Power 26 W	Voltage 230 V AC	Luminous flux 2100 lm
CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°	IP rating IP20
Certifications CE, Class II	Mounting Magnetic track	Finishes Black

Dimensions

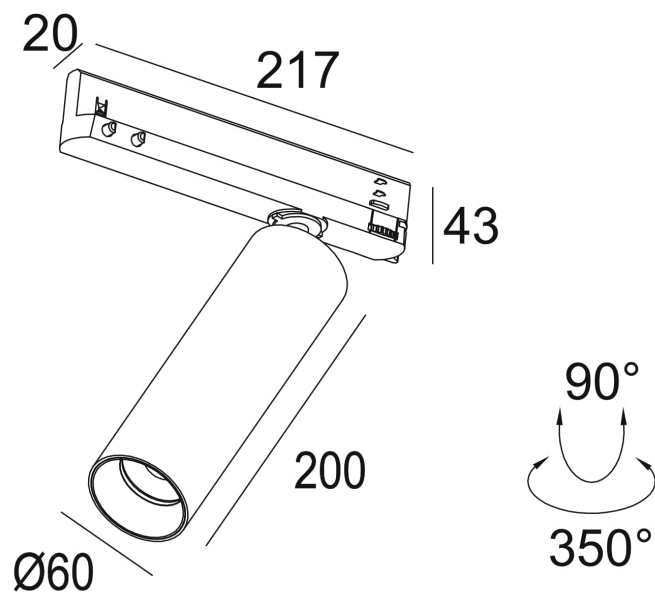


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
TR0248	26 W	230 V AC	2100 lm	97 CRI	Ø60 × 200 mm	15° 24° 36° 50°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0248, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0248, 26 W, 15° beam

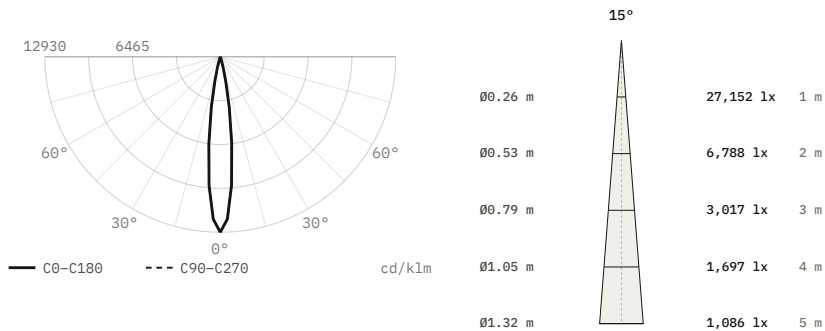


Luminous flux	2,100 lm
Efficacy	81 lm/W
Peak intensity	27,152 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data

TR0248, 26 W, 24° beam

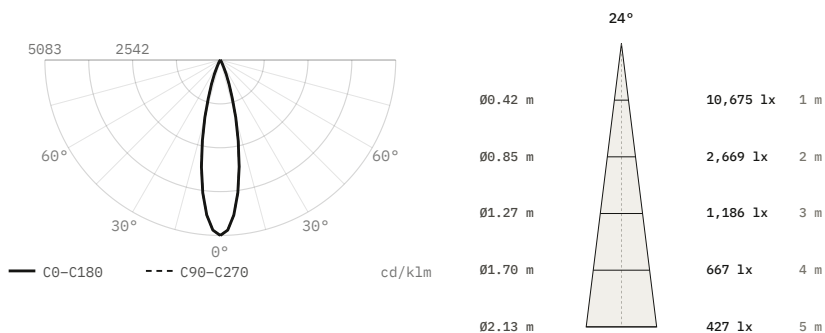


Luminous flux	2,100 lm
Efficacy	81 lm/W
Peak intensity	10,675 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data

TR0248, 26 W, 36° beam

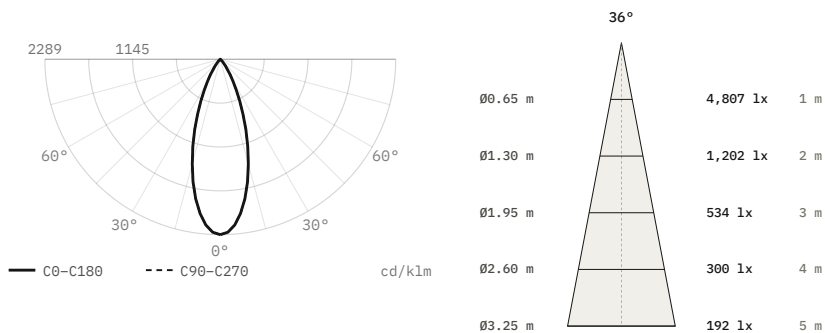

Luminous flux	2,100 lm
Efficacy	81 lm/W
Peak intensity	4,807 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data

TR0248, 26 W, 50° beam

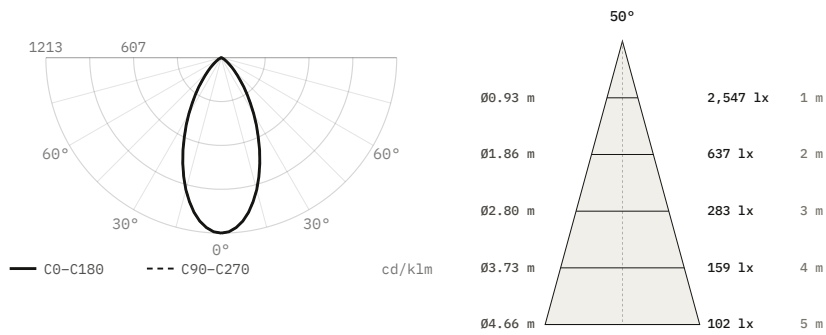

Luminous flux	2,100 lm
Efficacy	81 lm/W
Peak intensity	2,547 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data