


Recessed

Uniled DL0218

Recessed spotlight

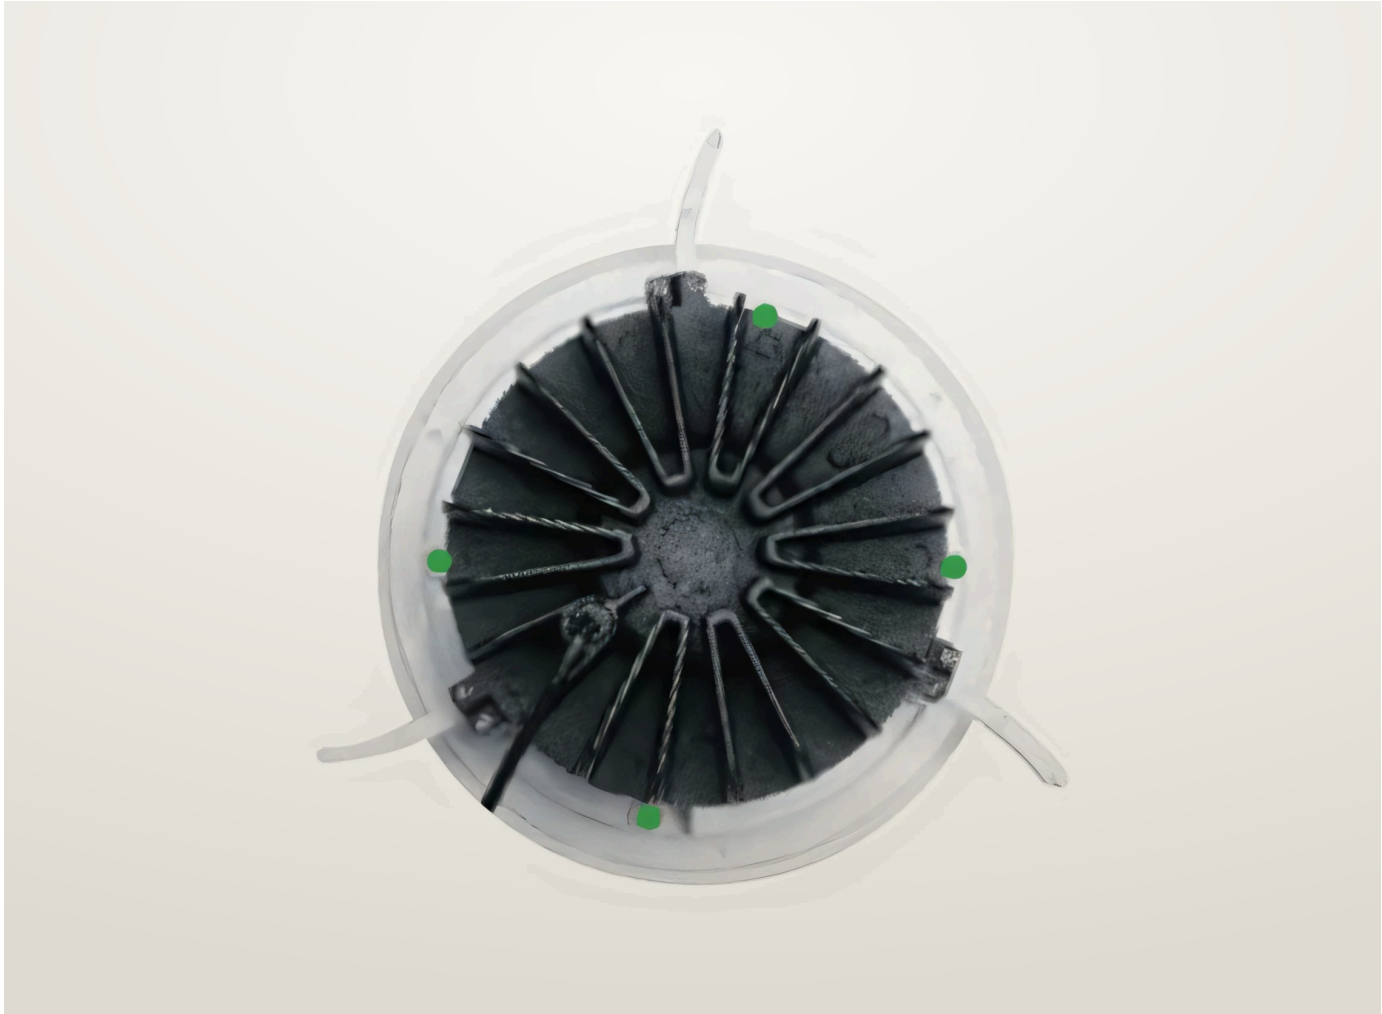


Recessed spotlight. 13, 18, 26, 33 or 39 W. Three beam angles, 15° to 50°. 2700, 3000, 4000 K. IP44. 97 CRI.

- Ceiling cut-out Ø150 mm
- LED source: Citizen
- UGR <19

Power 13–39 W	Voltage max 37 V	Luminous flux 1300–3800 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 30°, 50°
IP rating IP44	Certifications CE	Mounting Recessed
Control DALI	Finishes Black	

Dimensions

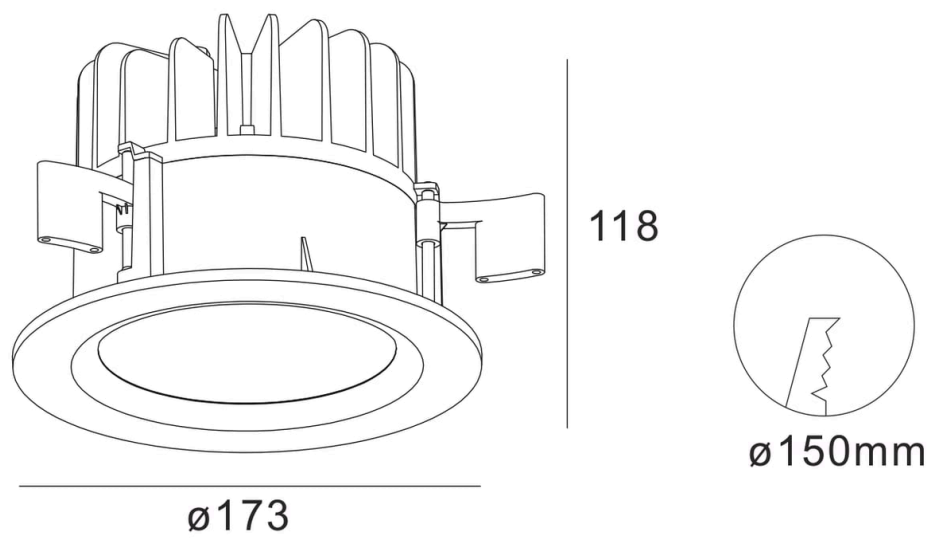


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0218	13 W	max 37 V	1300 lm	97 CRI	Ø173 x H118 mm	Ø150 mm	15° 30° 50°	350 mA
DL0346	18 W	max 37 V	1800 lm	97 CRI	Ø173 x H118 mm	Ø150 mm	15° 30° 50°	500 mA
DL0219	26 W	max 37 V	2600 lm	97 CRI	Ø173 x H118 mm	Ø150 mm	15° 30° 50°	700 mA
DL0265	33 W	max 37 V	3300 lm	97 CRI	Ø173 x H118 mm	Ø150 mm	15° 30° 50°	900 mA
DL0266	39 W	max 37 V	3800 lm	97 CRI	Ø173 x H118 mm	Ø150 mm	15° 30° 50°	1050 mA


Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


13 W

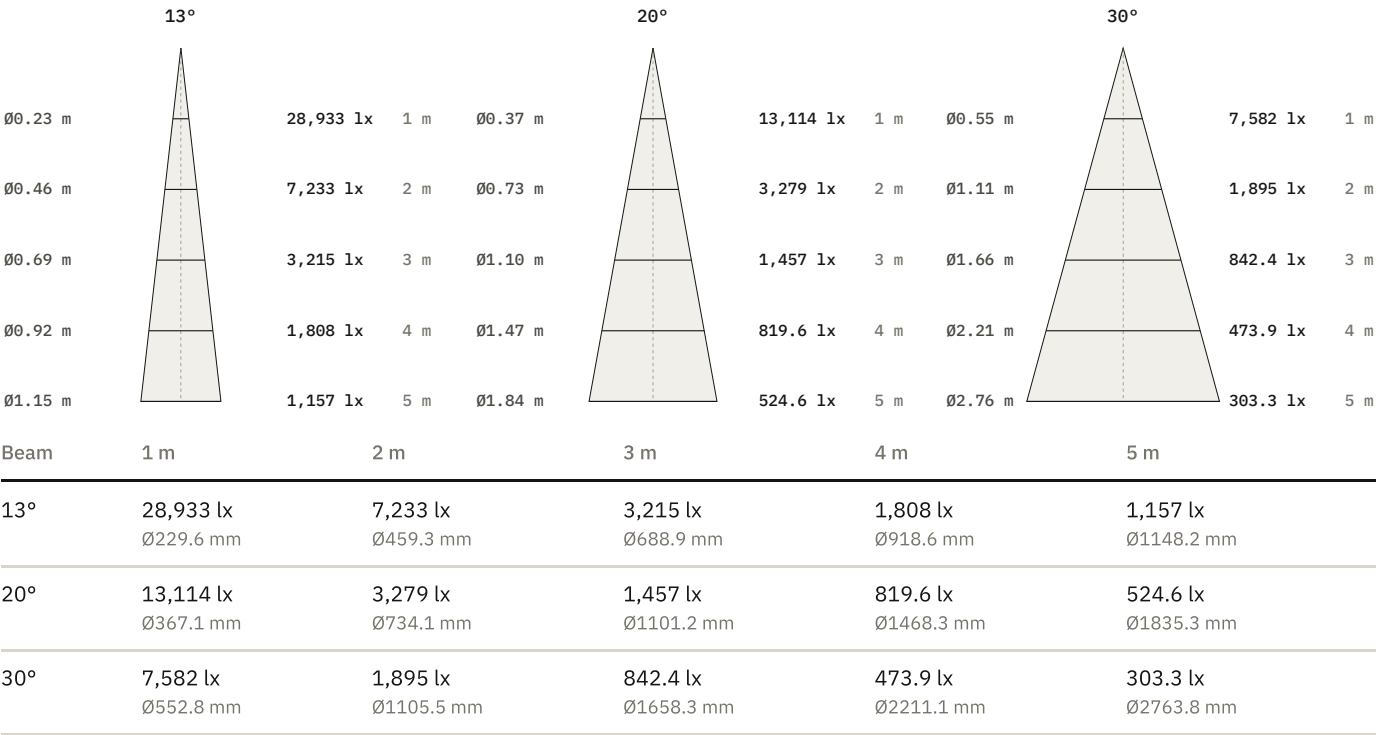


18 W

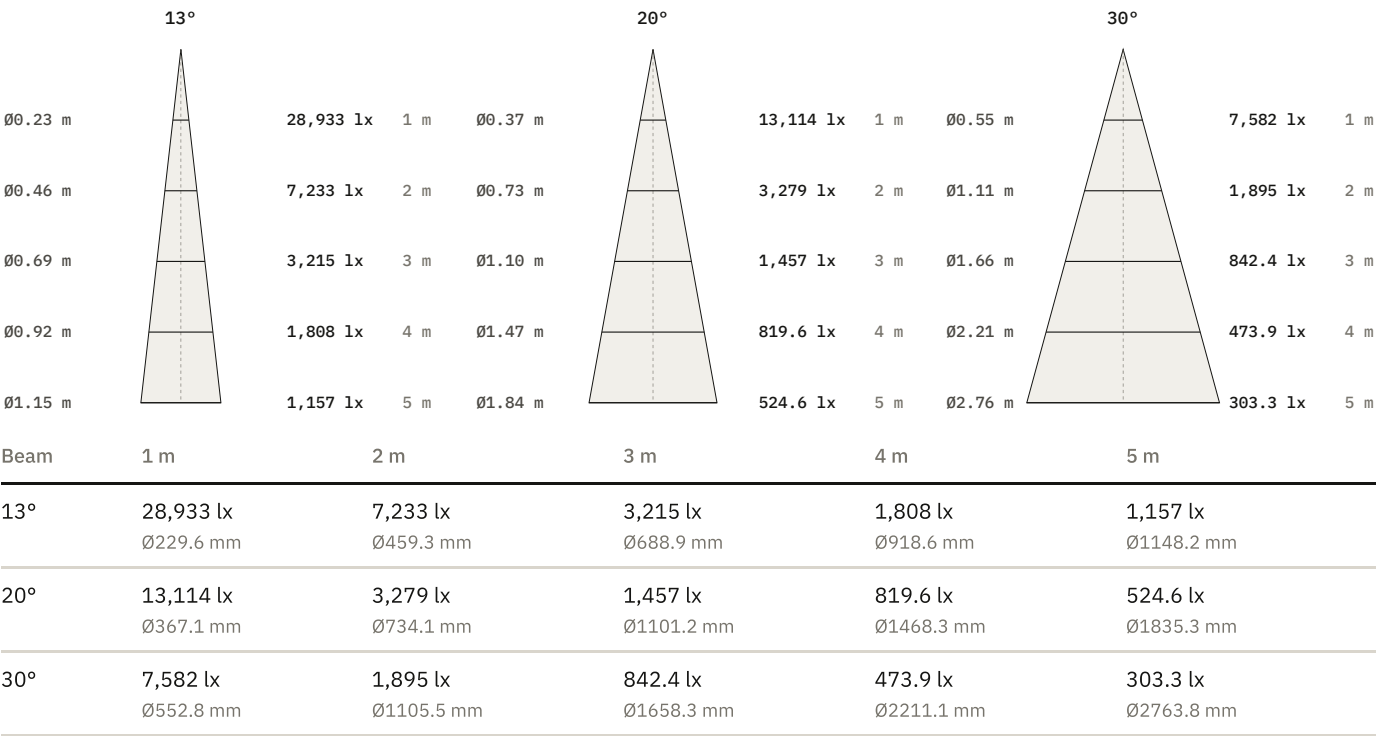


26 W

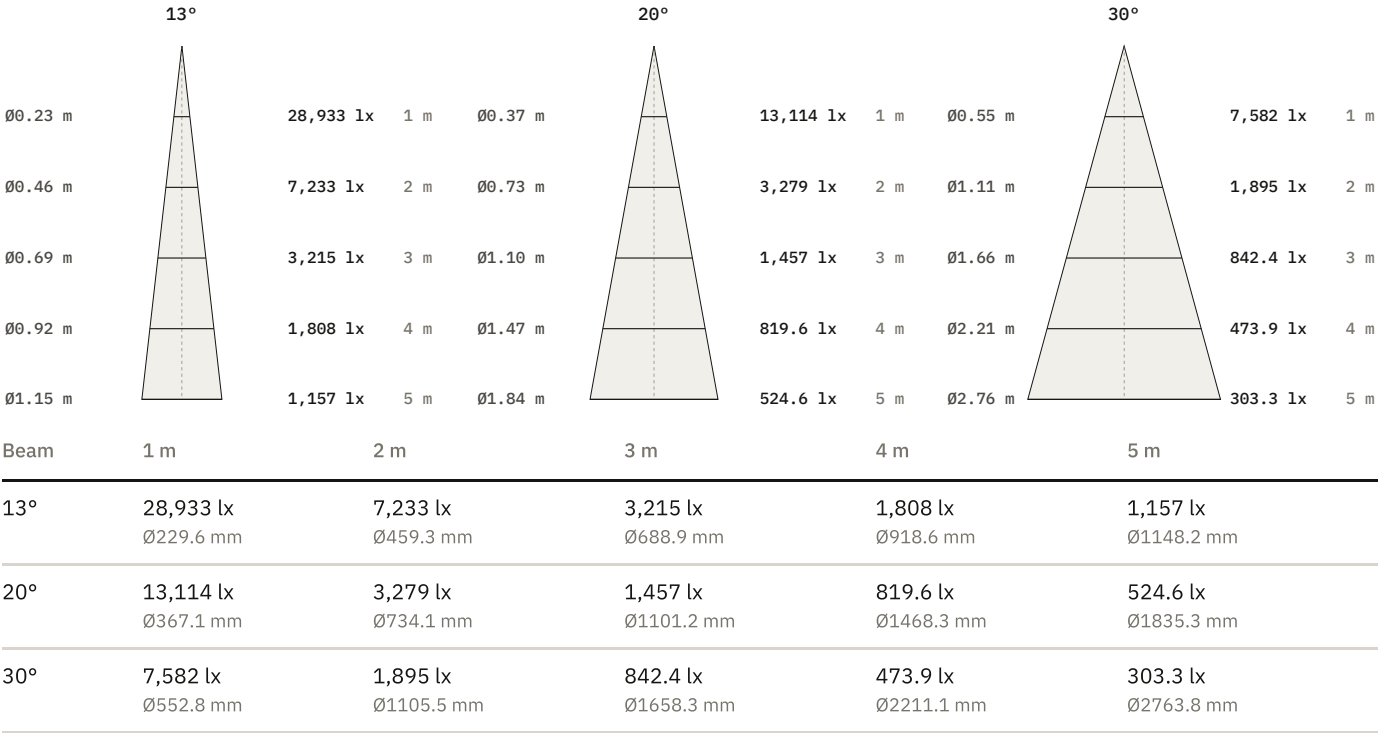

33 W

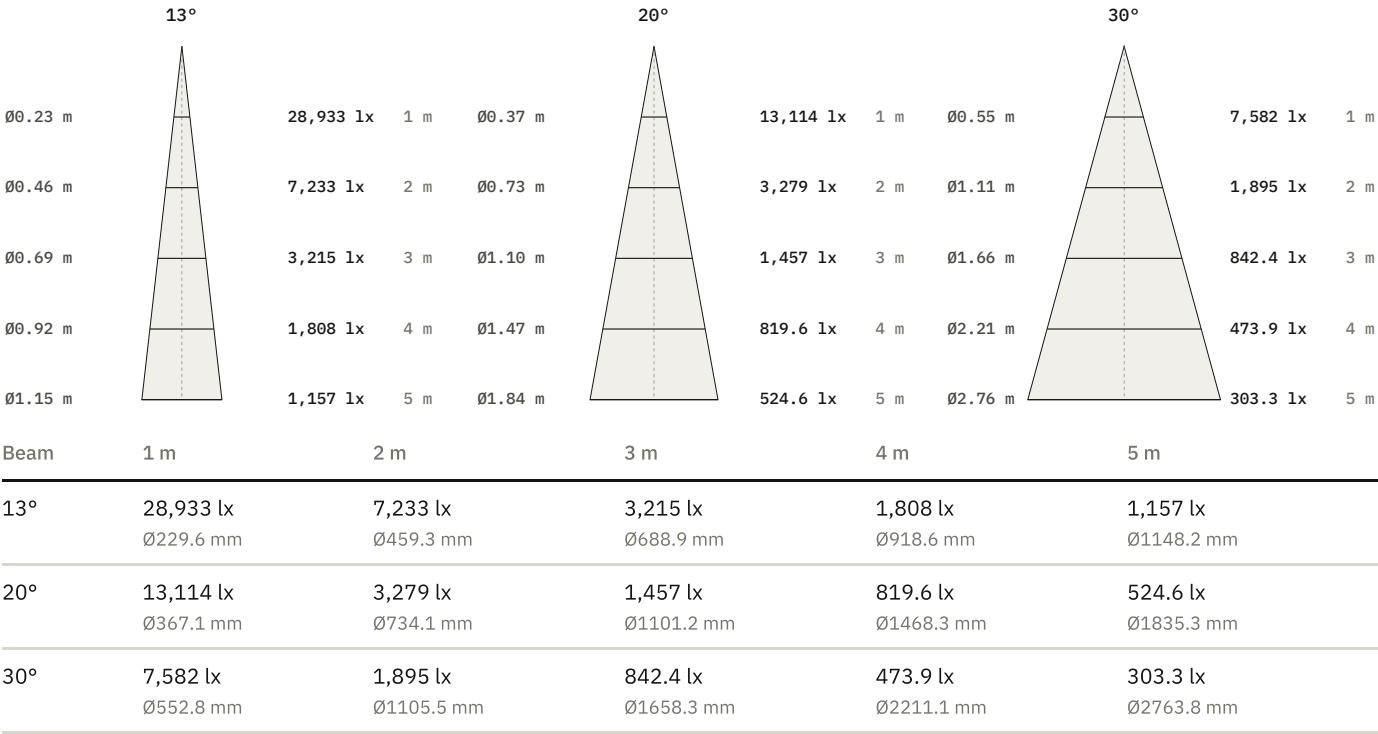


39 W

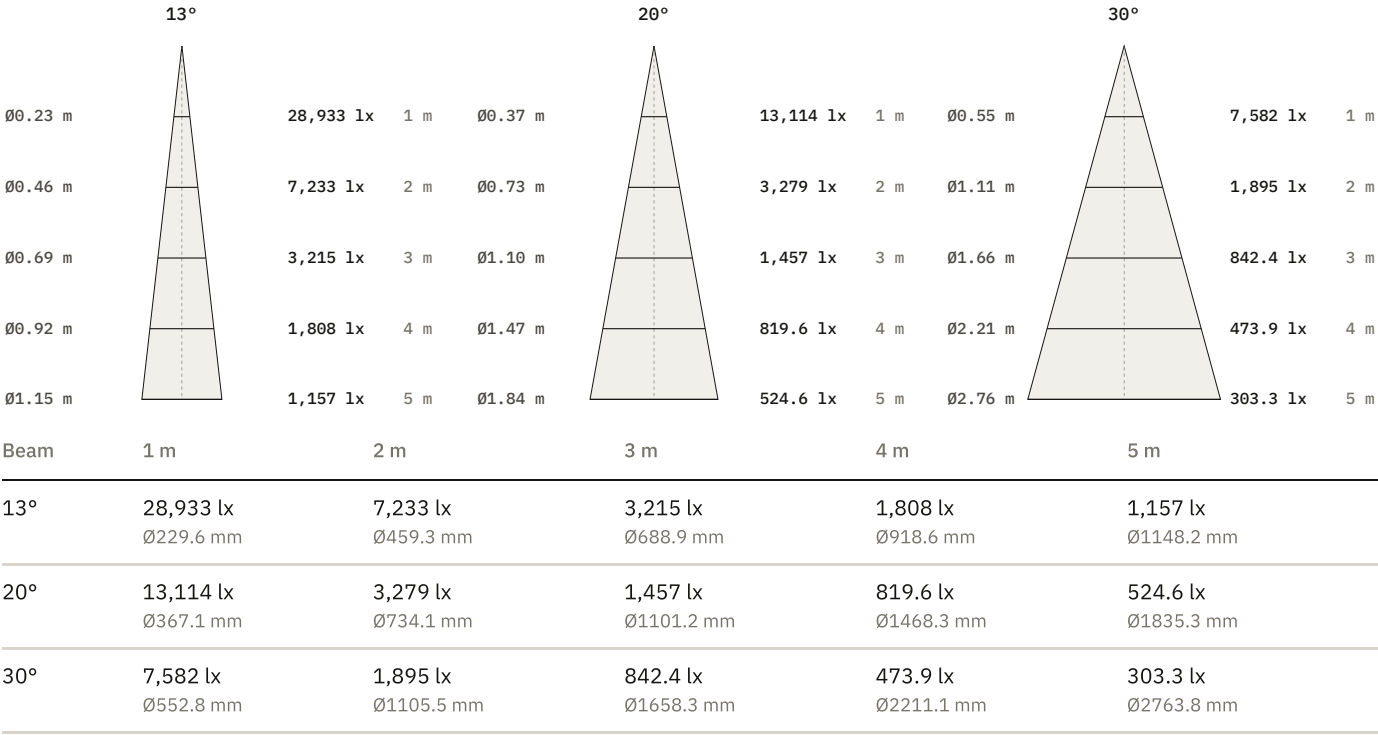

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0266, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0266, 39 W, 13° beam

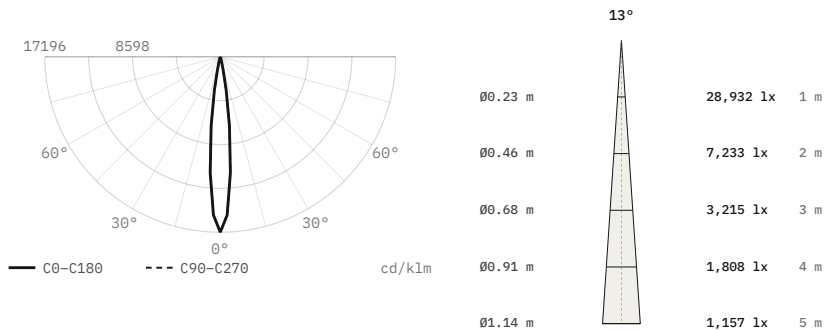


Luminous flux	1,682 lm
Efficacy	43 lm/W
Peak intensity	28,932 cd, 17,196 cd/klm
Beam angle (50%)	13°
Field angle (10%)	23.7°
Cut-off angle (2.5%)	14.5°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø173 × 118 mm
Data	Calculated from catalogue data

DL0266, 39 W, 20° beam

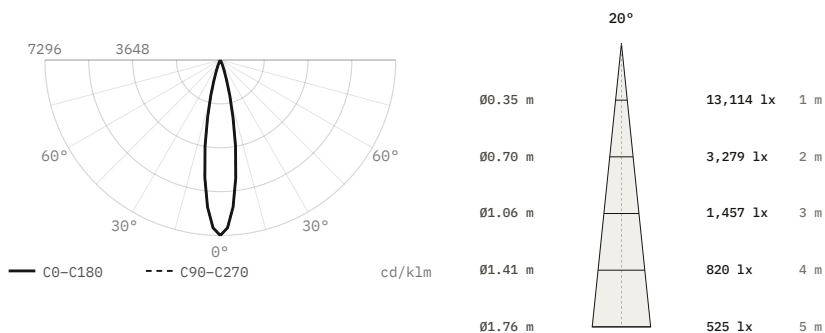


Luminous flux	1,797 lm
Efficacy	46 lm/W
Peak intensity	13,114 cd, 7,296 cd/klm
Beam angle (50%)	20°
Field angle (10%)	36.5°
Cut-off angle (2.5%)	23°
Flux 0–30° / 30–60° / 60–90°	99.8 / 0.2 / 0 %
Size	Ø173 × 118 mm
Data	Calculated from catalogue data

DL0266, 39 W, 30° beam

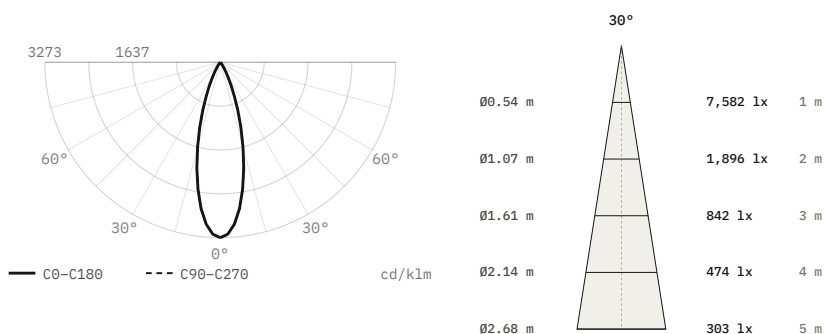


Luminous flux	2,317 lm
Efficacy	59 lm/W
Peak intensity	7,582 cd, 3,273 cd/klm
Beam angle (50%)	30°
Field angle (10%)	54.7°
Cut-off angle (2.5%)	34.5°
Flux 0–30° / 30–60° / 60–90°	94 / 6 / 0 %
Size	Ø173 × 118 mm
Data	Calculated from catalogue data

DL0266, 39 W, 15° beam

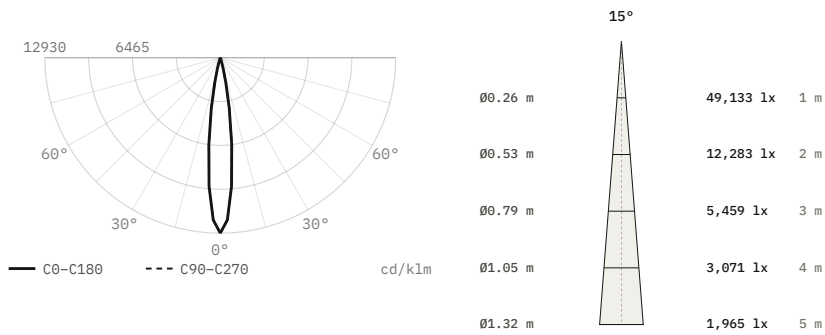

Luminous flux	3,800 lm
Efficacy	97 lm/W
Peak intensity	49,133 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø173 × 118 mm
Data	Calculated from catalogue data

DL0266, 39 W, 50° beam

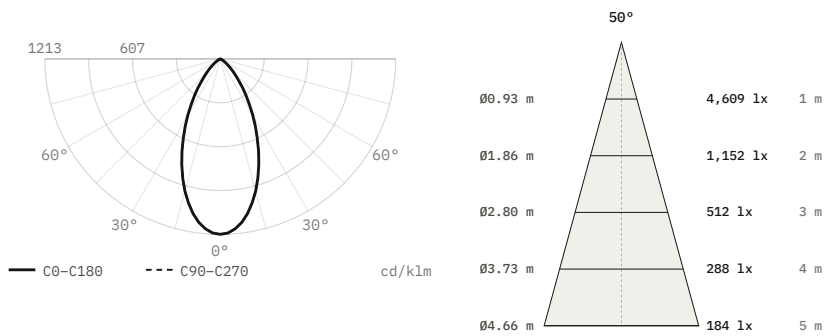

Luminous flux	3,800 lm
Efficacy	97 lm/W
Peak intensity	4,609 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø173 × 118 mm
Data	Calculated from catalogue data