

Recessed

Uniled DL1405

Recessed spotlight



Recessed spotlight. 15, 20, 25 or 30 W. 70° beam.
3000, 3500, 4000 K. IP44. 97 CRI.


— Ceiling cut-out Ø150 mm

— LED source: Citizen

— UGR <19

Power	Voltage	Luminous flux
15 W, 20 W, 25 W, 30 W	max 19 V, max 28 V, max 37 V, max 45 V	1300–3200 lm
Colour temperature	CRI	Beam angles
3000 K, 3500 K, 4000 K	97 CRI	70°
IP rating	Certifications	Mounting
IP44	CE	Recessed
Control		
On/Off, DALI		

Dimensions

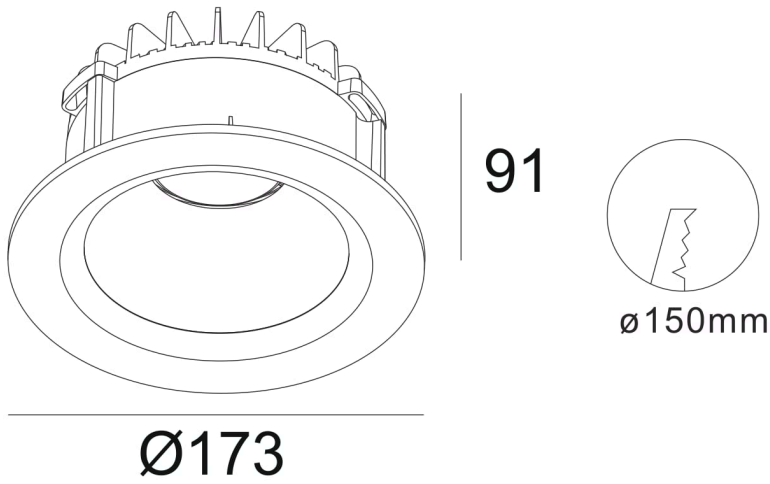

Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1405	15 W	max 19 V	1300 lm	97 CRI	Ø173 x H91 mm	Ø150 mm	70°	700 mA
DL1406	20 W	max 28 V	1800 lm	97 CRI	Ø173 x H91 mm	Ø150 mm	70°	700 mA
DL1407	25 W	max 37 V	2500 lm	97 CRI	Ø173 x H91 mm	Ø150 mm	70°	700 mA
DL1408	30 W	max 45 V	3200 lm	97 CRI	Ø173 x H91 mm	Ø150 mm	70°	700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1408, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1408, 30 W, 70° beam

