

Linear

Venice OL-KNMF24320T00-8A19

Linear luminaire




Linear luminaire. 10 W. 103.4° beam. 2700, 3000, 4000, 6500 K. IP68. 97 CRI.

— LED source: Citizen

Power 10 W	Voltage 24 V	Luminous flux undefined–undefined lm
Colour temperature 2700 K, 3000 K, 4000 K, 6500 K	CRI 97 CRI	Beam angles 103.4°
IP rating IP68	Certifications CE, RoHS, UL	Mounting Recessed
Finishes White, Black		


Dimensions

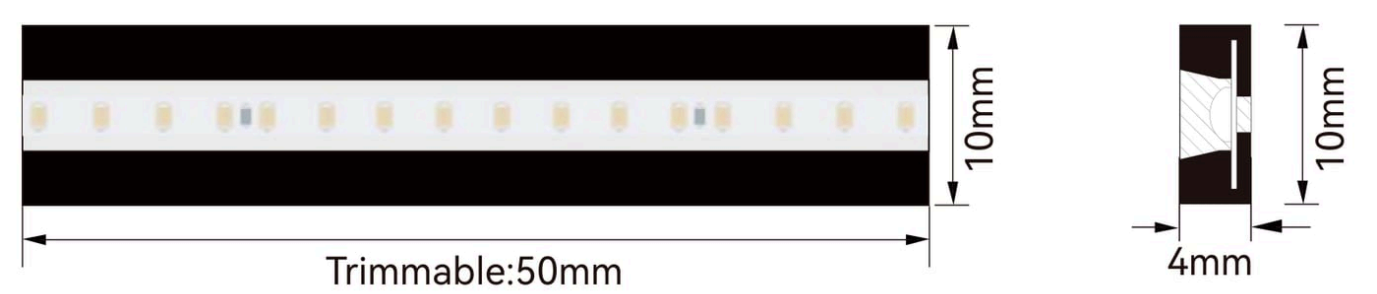

Models

Code	Power	Voltage	Flux	CRI	Size	Beam	Notes
OL-KNMF24320T00-8A19	10 W	24 V	300 lm/m	97 CRI	10 × 4 mm cross-section (PCB width 8 mm)	103.4°	Power per metre
OL-INMF24320T00-8A19	10 W	24 V	340 lm/m	97 CRI	10 × 4 mm cross-section (PCB width 8 mm)	103.4°	Power per metre
OL-DNMF24320T00-8A19	10 W	24 V	320 lm/m	97 CRI	10 × 4 mm cross-section (PCB width 8 mm)	103.4°	Power per metre
OL-WNMF24320T00-8A19	10 W	24 V	310 lm/m	97 CRI	10 × 4 mm cross-section (PCB width 8 mm)	103.4°	Power per metre


Finishes

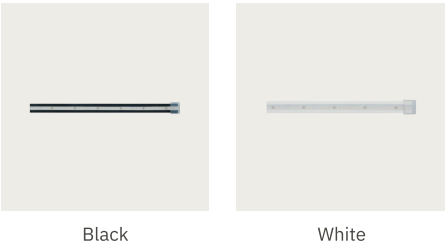

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


10 W

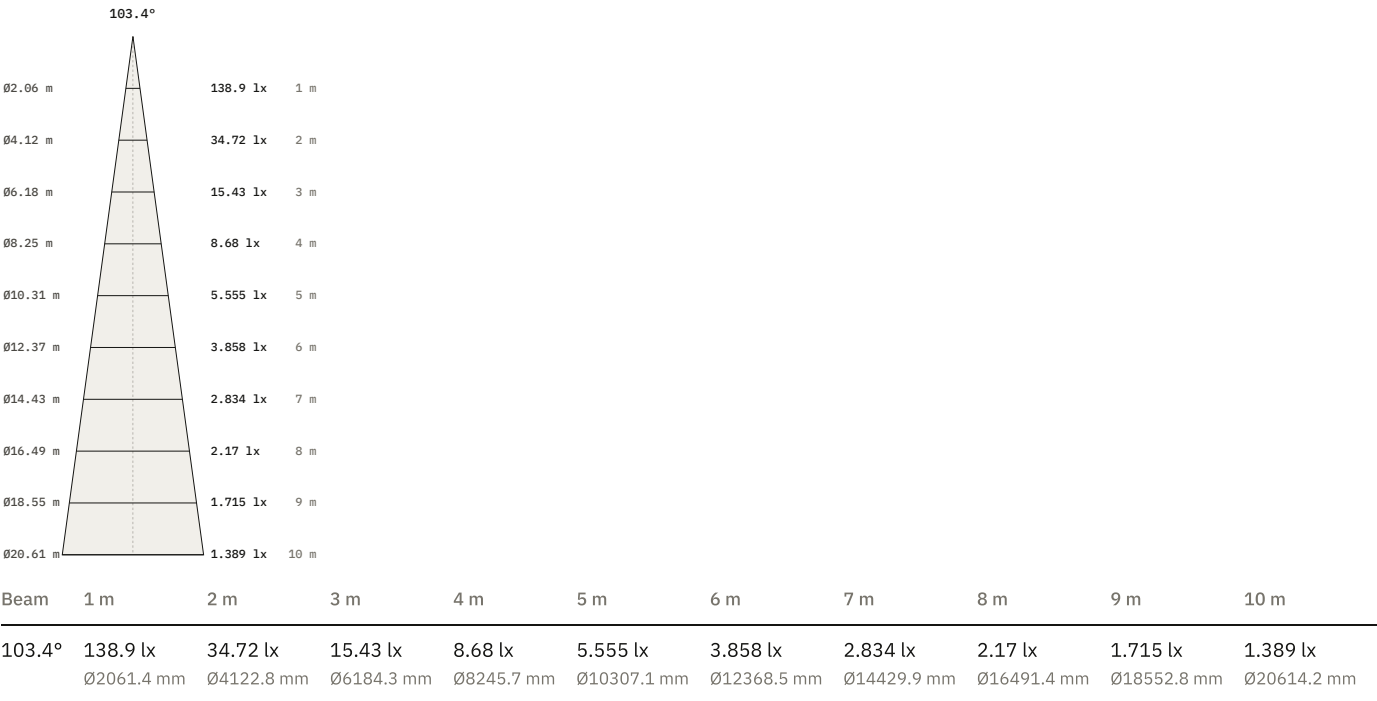

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OL-KNMF24320T00-8A19, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

OL-KNMF24320T00-8A19, 10 W, 103.4° beam

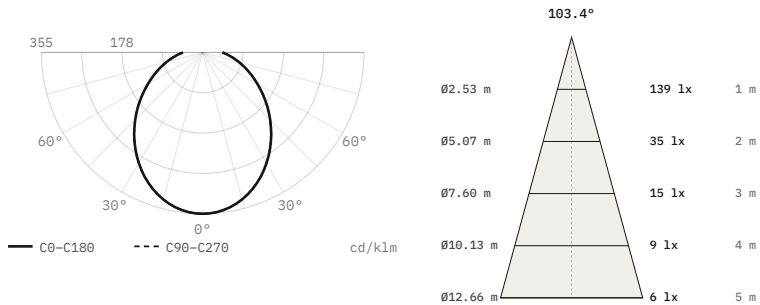

Luminous flux	391 lm
Efficacy	39 lm/W
Peak intensity	139 cd, 355 cd/klm
Beam angle (50%)	103.4°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	26.7 / 46.8 / 26.5 %
Size	10 × 4 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.