

Recessed

Vero DL1425

Recessed spotlight




Recessed spotlight. 13 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø60 mm
- LED source: Citizen

Power 13 W	Voltage max 37 V	Luminous flux 1080 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes White		

Dimensions

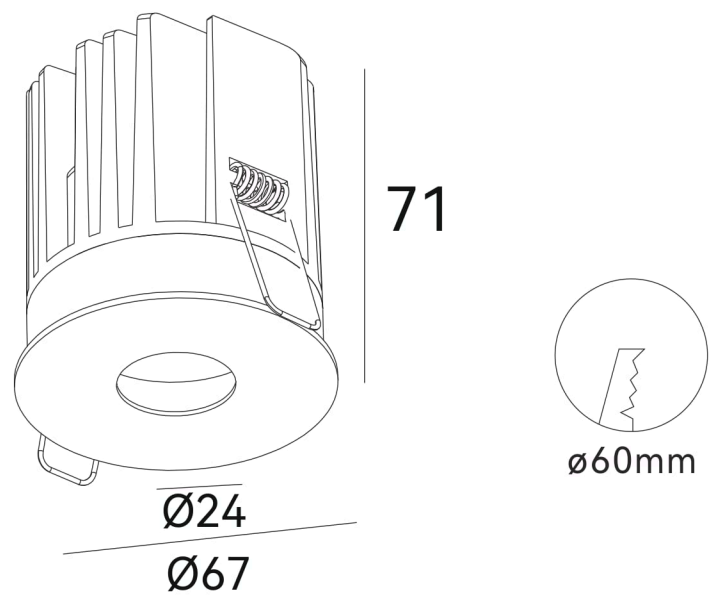


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1425	13 W	max 37 V	1080 lm	97 CRI	Ø67 × 71 mm	Ø60 mm	15° 24° 36° 50°	350 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1425, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1425, 13 W, 15° beam

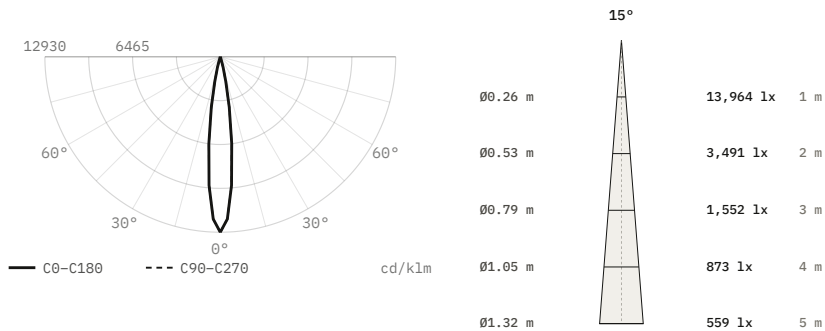


Luminous flux	1,080 lm
Efficacy	83 lm/W
Peak intensity	13,964 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø67 × 71 mm
Data	Calculated from catalogue data

DL1425, 13 W, 24° beam

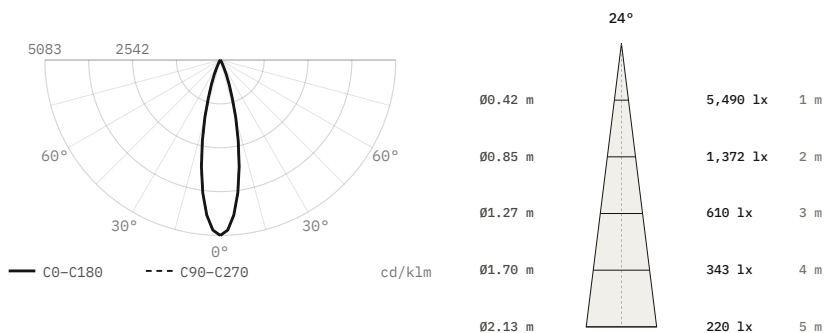


Luminous flux	1,080 lm
Efficacy	83 lm/W
Peak intensity	5,490 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø67 × 71 mm
Data	Calculated from catalogue data

DL1425, 13 W, 36° beam

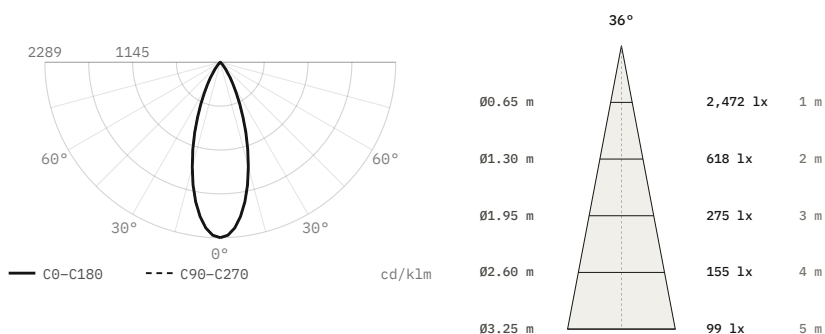

Luminous flux	1,080 lm
Efficacy	83 lm/W
Peak intensity	2,472 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø67 × 71 mm
Data	Calculated from catalogue data

DL1425, 13 W, 50° beam

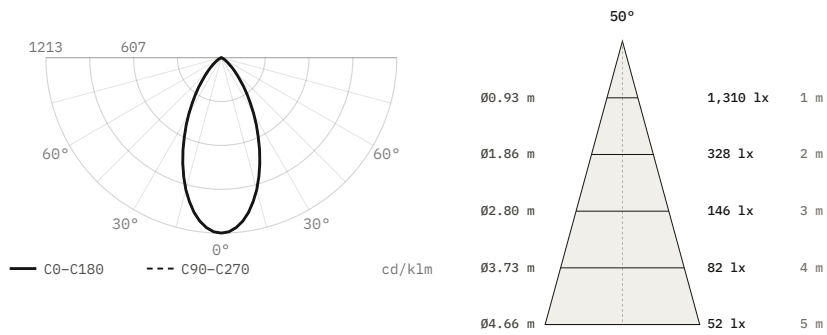

Luminous flux	1,080 lm
Efficacy	83 lm/W
Peak intensity	1,310 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø67 × 71 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.