

Recessed

Vero DL1917

Recessed spotlight




Recessed spotlight. 10 or 13 W. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø68 / Ø76 mm
- LED source: Citizen

Power 10 W, 13 W	Voltage max 18 V, max 36 V	Luminous flux 560 lm, 900 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	IP rating IP20
Certifications CE	Mounting Recessed	Finishes White

Dimensions

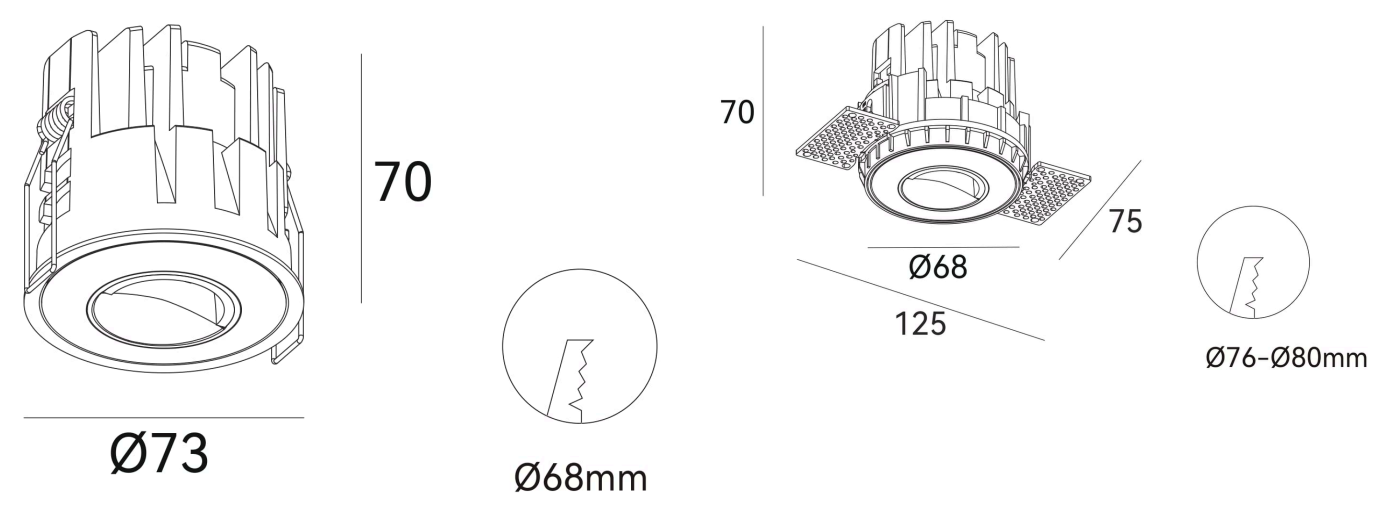

Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1917	10 W	max 18 V	560 lm	97 CRI	$\varnothing 73 \times 70$ mm	$\varnothing 68$ mm	350 / 500 mA
DL1917	13 W	max 36 V	900 lm	97 CRI	$\varnothing 73 \times 70$ mm	$\varnothing 68$ mm	350 / 500 mA
DL1918	10 W	max 18 V	560 lm	97 CRI	$\varnothing 68 \times 70$ mm (plates 125×75)	$\varnothing 76$ mm	350 / 500 mA
DL1918	13 W	max 36 V	900 lm	97 CRI	$\varnothing 68 \times 70$ mm (plates 125×75)	$\varnothing 76$ mm	350 / 500 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1917, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1917, 13 W, wide distribution

