Outdoor

M26 0601

Outdoor luminaire




Outdoor luminaire. 6 W. 100° or 120° beam. 2700, 3000, 4000 K. IP65. 97 CRI.

- LED source: Citizen

Power **6 W**	Voltage **220–240 V AC**	Colour temperature **2700 K, 3000 K, 4000 K**
CRI **97 CRI**	Beam angles **100°, 120°**	IP rating **IP65**
Mounting **Wall**	Control **On/Off**	Finishes **White, Black, Silver, Brass, Bronze**

Dimensions

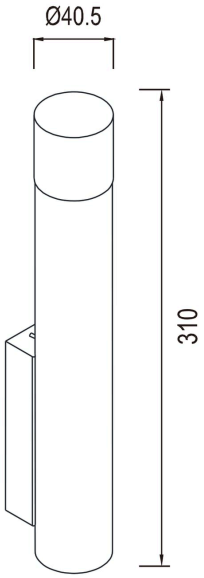

Models

Code	Version	Power	Voltage	CRI	Size	Beam	Notes
WA-M26-0601	Up and down, 100–120°	6 W	220–240 V AC	97 CRI	Ø40.5 × 310 mm	100° 120°	150 mA


Finishes




Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WA-M26-0601, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


WA-M26-0601, 6 W, 100° beam

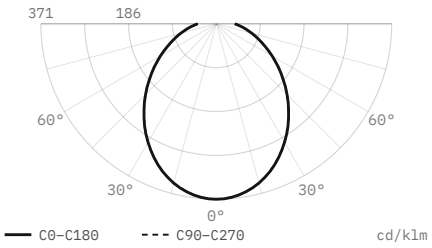


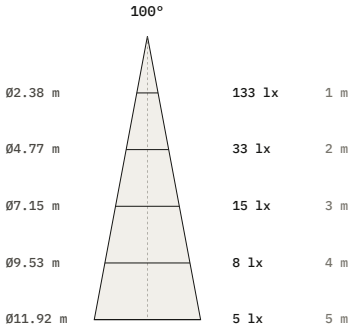

Luminous flux	360 lm
Efficacy	60 lm/W
Peak intensity	133 cd, 371 cd/klm
Beam angle (50%)	100°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	27.6 / 47.2 / 25.2 %
Size	Ø40.5 × 310 mm
Data	Estimated from catalogue data

WA-M26-0601, 6 W, 120° beam

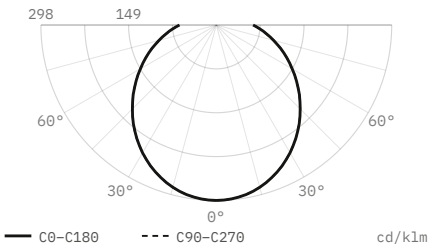

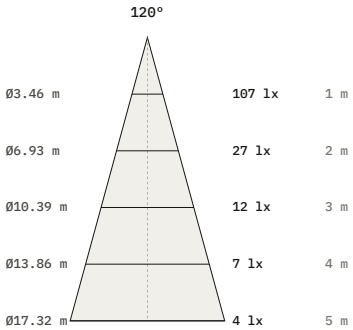

Luminous flux	360 lm
Efficacy	60 lm/W
Peak intensity	107 cd, 298 cd/klm
Beam angle (50%)	120°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23 / 45.1 / 31.8 %
Size	Ø40.5 × 310 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.