

Suspended

Zoom PH0011

Pendant




Pendant. 15 W. Three beam angles, 24° to 60°. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 15 W	Voltage 230 V AC	Luminous flux 1180 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 24°, 36°, 60°
IP rating IP20	Certifications CE	Mounting Suspended
Finishes White		

Dimensions

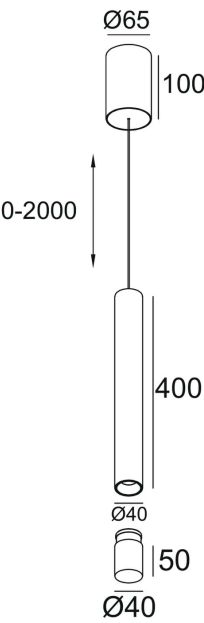


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
PH0011	15 W	230 V AC	1180 lm	97 CRI	Ø40 × 400 mm; canopy Ø65 × 100 mm; suspension 0–2000 mm	24° 36° 60°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0011, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

PH0011, 15 W, 24° beam

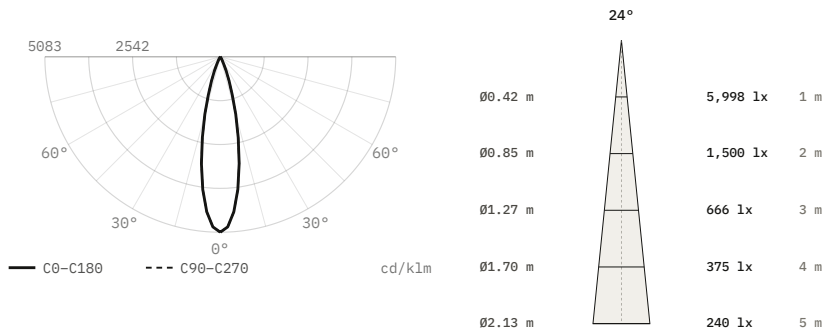


Luminous flux	1,180 lm
Efficacy	79 lm/W
Peak intensity	5,998 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø40 × 400 mm
Data	Calculated from catalogue data

PH0011, 15 W, 36° beam

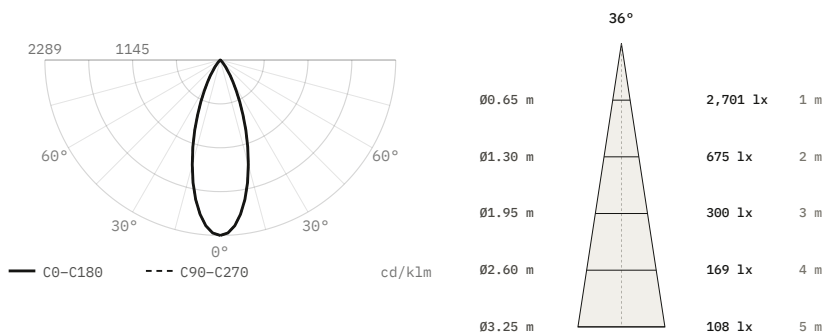

Luminous flux	1,180 lm
Efficacy	79 lm/W
Peak intensity	2,701 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø40 × 400 mm
Data	Calculated from catalogue data

PH0011, 15 W, 60° beam

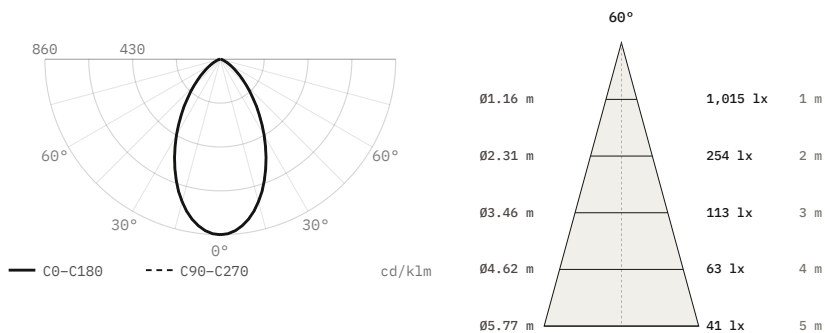

Luminous flux	1,180 lm
Efficacy	79 lm/W
Peak intensity	1,015 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø40 × 400 mm
Data	Calculated from catalogue data

