

Suspended

Zoom PH0065

Pendant



Pendant. 8 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 8 W	Voltage 220 V AC	Luminous flux 630 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 60°
IP rating IP20	Certifications CE	Mounting Recessed, Suspended
Finishes Black		


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
PH0065	8 W	220 V AC	630 lm	97 CRI	Ø250 × 127 mm disc; canopy Ø65 × 100 mm; suspension 0–2000 mm	15° 24° 36° 60°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0065, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

PH0065, 8 W, 15° beam

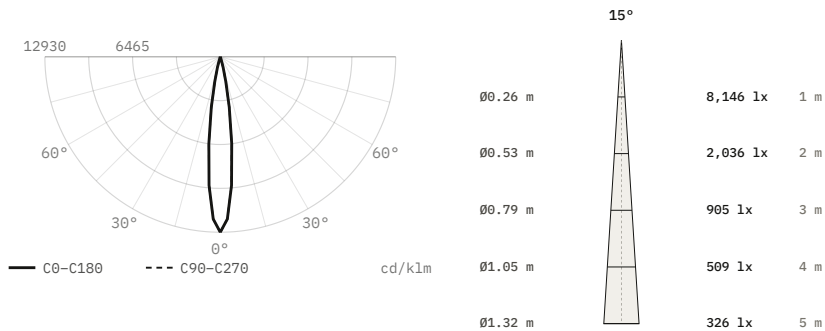


Luminous flux	630 lm
Efficacy	79 lm/W
Peak intensity	8,146 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø250 × 127 mm
Data	Calculated from catalogue data

PH0065, 8 W, 24° beam

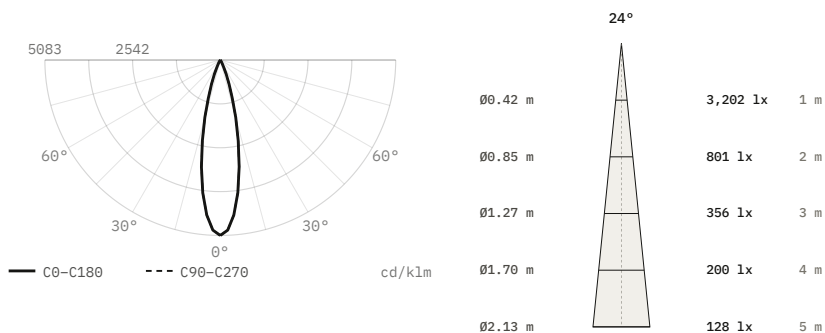


Luminous flux	630 lm
Efficacy	79 lm/W
Peak intensity	3,202 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø250 × 127 mm
Data	Calculated from catalogue data

PH0065, 8 W, 36° beam

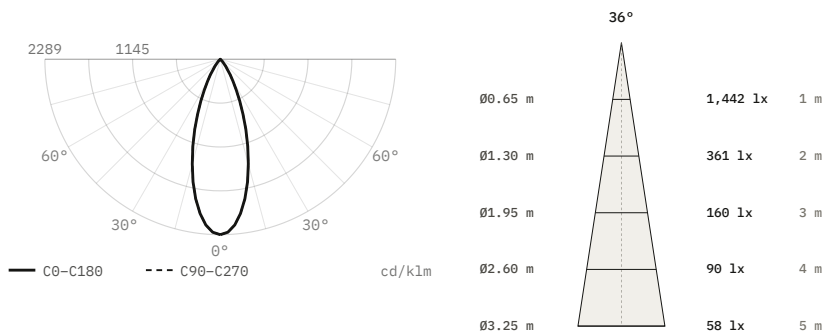

Luminous flux	630 lm
Efficacy	79 lm/W
Peak intensity	1,442 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø250 × 127 mm
Data	Calculated from catalogue data

PH0065, 8 W, 60° beam

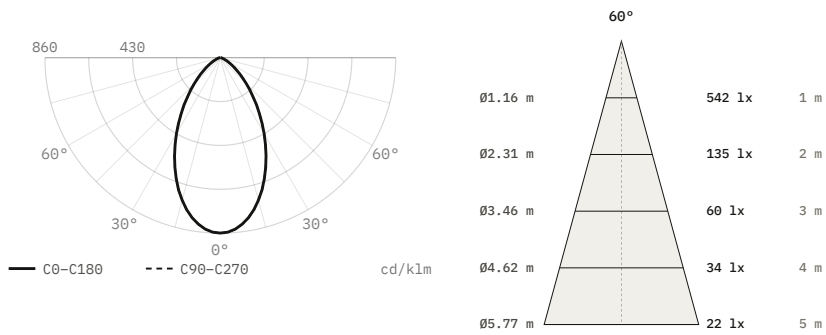

Luminous flux	630 lm
Efficacy	79 lm/W
Peak intensity	542 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0-30° / 30-60° / 60-90°	52.4 / 42.6 / 5 %
Size	Ø250 × 127 mm
Data	Calculated from catalogue data