

Linear

Bet DL1660

Linear luminaire



Linear luminaire. 13 W. Six beam angles, 15° to 90°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø227 mm
- LED source: Citizen

Power 13 W	Voltage max 36 V	Luminous flux 1180 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 38°, 45°, 90°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes Black		


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1660	Wall washer	13 W	max 36 V	1180 lm	97 CRI	L216/282 x W22/33 x H45 mm	Ø227 mm	15° 24° 36° 38° 45° 90°	350 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1660, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1660, 13 W, wall washer

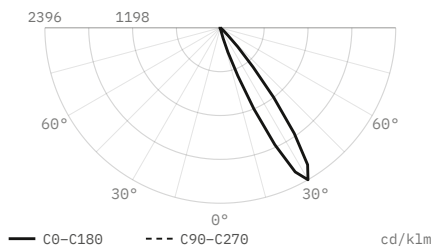


Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	2,827 cd, 2,396 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	79.5°
Flux 0–30° / 30–60° / 60–90°	17.4 / 73.1 / 9.4 %
Size	216 × 22 × 45 mm
Data	Calculated from catalogue data

DL1660, 13 W, wall washer

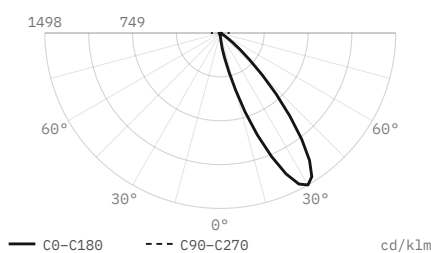


Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	1,767 cd, 1,498 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	20.7 / 68.8 / 10.5 %
Size	216 × 22 × 45 mm
Data	Calculated from catalogue data

DL1660, 13 W, wall washer

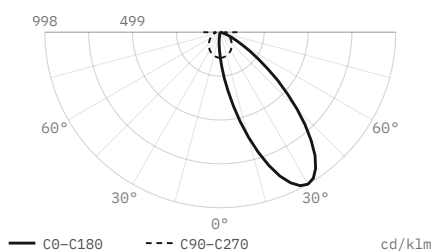


Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	1,178 cd, 998 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23.3 / 62.5 / 14.1 %
Size	216 × 22 × 45 mm
Data	Calculated from catalogue data

DL1660, 13 W, wall washer

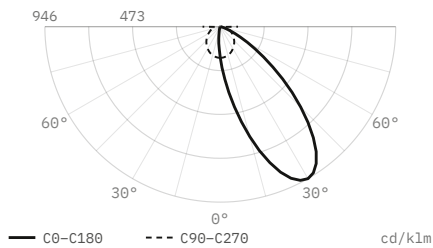


Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	1,116 cd, 946 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23.6 / 61.5 / 14.9 %
Size	216 × 22 × 45 mm
Data	Calculated from catalogue data

DL1660, 13 W, wall washer

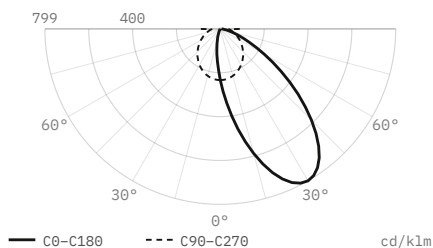

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	943 cd, 799 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	24.5 / 57.9 / 17.6 %
Size	216 × 22 × 45 mm
Data	Calculated from catalogue data

DL1660, 13 W, wall washer

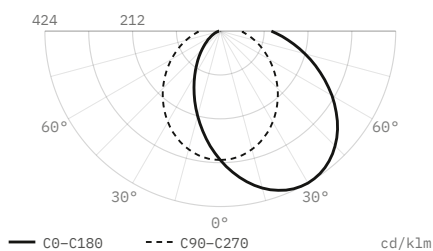

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	500 cd, 424 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	24.2 / 47.2 / 28.6 %
Size	216 × 22 × 45 mm
Data	Calculated from catalogue data