Chandel-Track 13 mm system

FT1500 flexible light line

Chandel-Track linear luminaire




Linear luminaire for the Chandel-Track 48 V track system. 21 W. 2700, 3000, 4000, 5000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
21 W	48 V DC	2700 K, 3000 K, 4000 K, 5000 K
CRI	**Mounting**	**Finishes**
97 CRI	Magnetic track	Black, Nickel, Gold

Dimensions

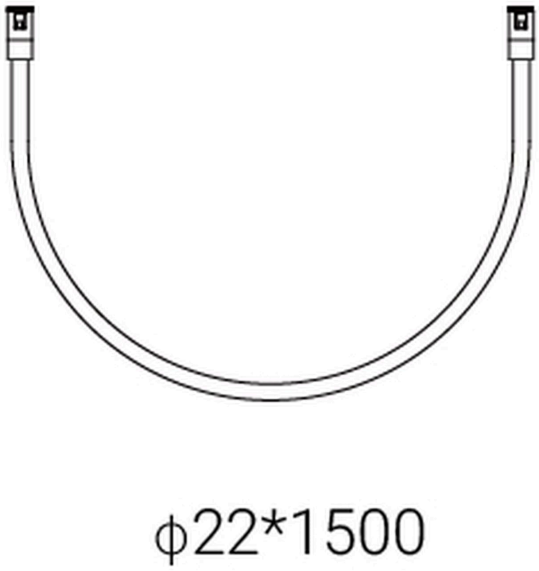

Models

Code	Version	Power	Voltage	CRI	Size
CT13-FT1500	Silicone, 360° light	21 W	48 V DC	97 CRI	Ø22 × 1500 mm

Finishes



Gold



Nickel





Black

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CT13-FT1500, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CT13-FT1500, 21 W, wide distribution

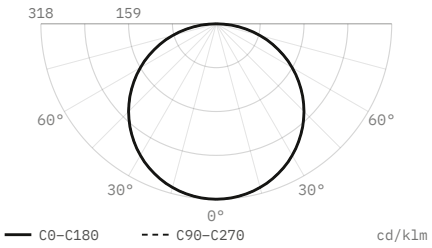

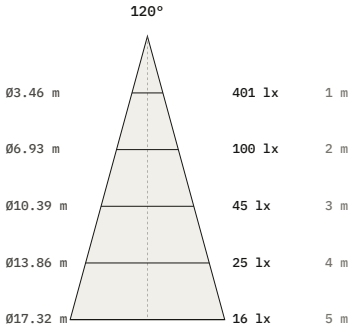

Luminous flux	**1,260 lm**
Efficacy	**60 lm/W**
Peak intensity	**401 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**Ø22 × 1500 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.