Chandel-Track 13 mm system

R70

Chandel-Track pendant



Pendant for the Chandel-Track 48 V track system. 4 W. 70° beam. 2700, 3000, 4000, 5000 K. 97 CRI.


- LED source: Citizen

Power	Voltage	Colour temperature
4 W	48 V DC	2700 K, 3000 K, 4000 K, 5000 K
CRI	**Beam angles**	**Mounting**
97 CRI	70°	Magnetic track

Finishes

Black, Nickel, Gold

Dimensions

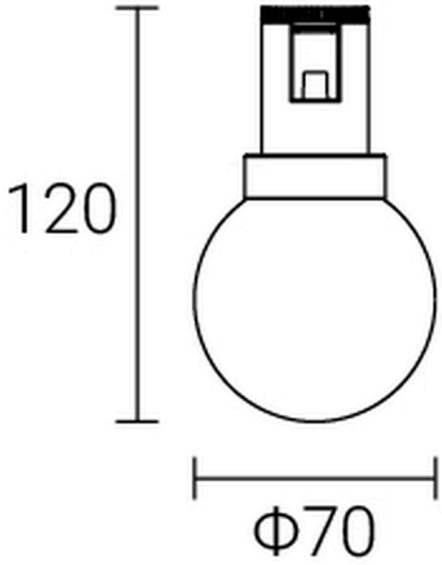



Models

Code	Power	Voltage	CRI	Size	Beam
CT13-R70	4 W	48 V DC	97 CRI	Ø70 × 120 mm	70°

Finishes


Gold



Nickel



Black

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CT13-R70, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CT13-R70, 4 W, 70° beam

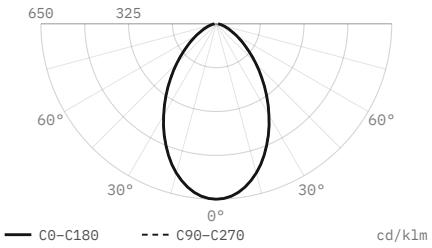

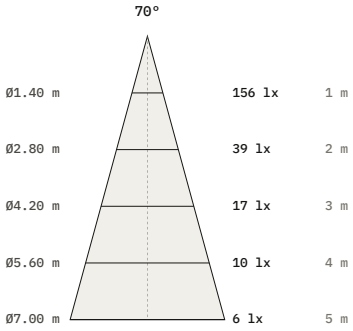

Luminous flux	**240 lm**
Efficacy	**60 lm/W**
Peak intensity	**156 cd, 650 cd/klm**
Beam angle (50%)	**70°**
Field angle (10%)	**127.6°**
Cut-off angle (2.5%)	**80.5°**
Flux 0–30° / 30–60° / 60–90°	**43 / 46.9 / 10.1 %**
Size	**Ø70 × 120 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.