

Superslim 5 mm system

Limb LP200

Superslim 5 mm surface luminaire




Surface luminaire for the Superslim 5 mm magnetic track. 10 W. 2700, 3000, 4000, 5000 K. 97 CRI.

— LED source: Citizen

Power 10 W	Voltage 48 V DC	Colour temperature 2700 K, 3000 K, 4000 K, 5000 K
CRI 97 CRI	Mounting Magnetic track	Control Casambi, Tuya, DALI, 0-10V
Finishes White, Black		

Dimensions

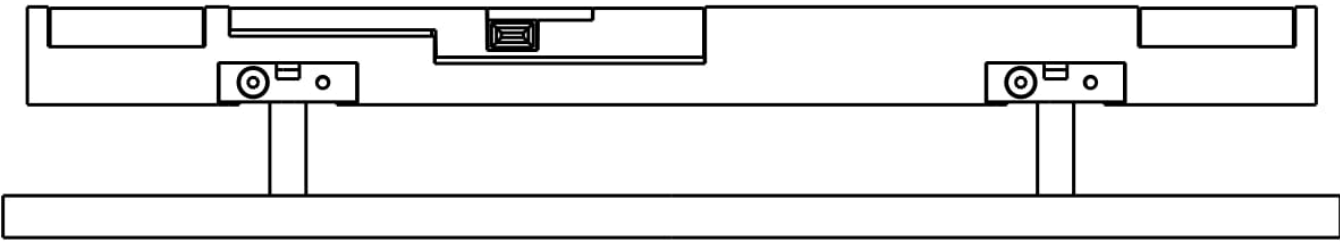

192

Models

Code	Power	Voltage	CRI	Size
LP200	10 W	48 V DC	97 CRI	Ø192 mm

Finishes



Black




White

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for LP200, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

LP200, 10 W, wide distribution

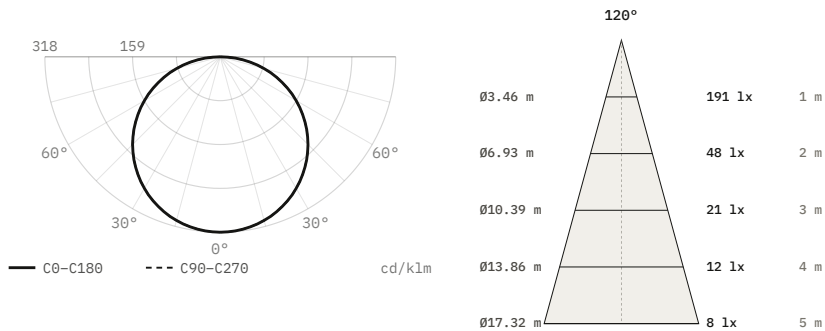

Luminous flux	600 lm
Efficacy	60 lm/W
Peak intensity	191 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	Ø192 mm
Data	Estimated from catalogue data

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.