

Track spotlights

S3-6038B

Track spotlight




Track spotlight. 32 W. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 32 W	Luminous flux 3700–3800 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	IP rating IP20	Certifications CE, RoHS, EMC, LVD
Mounting Magnetic track	Control DALI, 0-10V, Triac, Casambi	Finishes White, Black, Grey

Dimensions

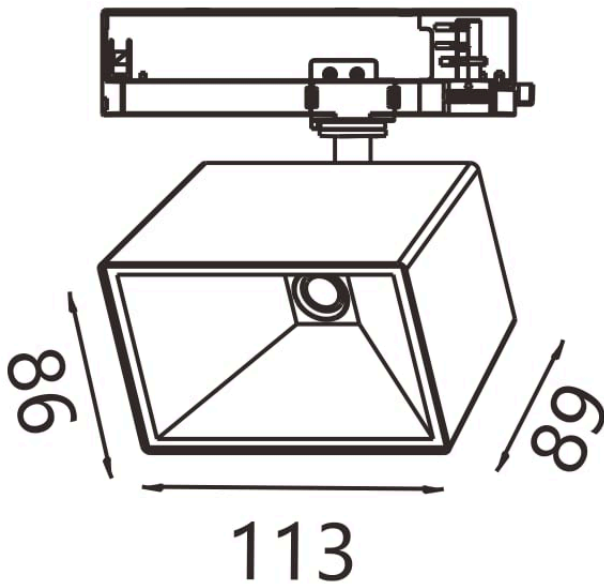


Models

Code	Version	Power	Flux	CRI	Size
S3-6038B	Wall washer	32 W	3700–3800 lm	97 CRI	113 × 98 × 89 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for S3-6038B, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

S3-6038B, 32 W, wall washer

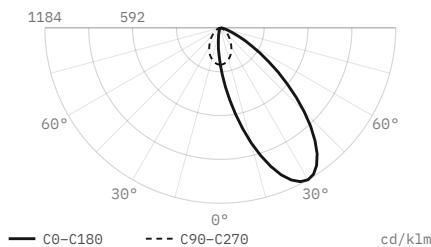

Luminous flux	3,700 lm
Efficacy	116 lm/W
Peak intensity	4,379 cd, 1,184 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	80°
Flux 0–30° / 30–60° / 60–90°	29.6 / 61.1 / 9.3 %
Size	113 × 98 × 89 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.