

Track spotlights

Tour TR0110

Track spotlight



Track spotlight. 26 W. Four beam angles, 15° to 50°. — LED source: Citizen
2700, 3000, 4000 K. 97 CRI.

Power 26 W	Voltage 48 V DC	Luminous flux 1800 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°
IP rating IP20	Certifications CE, Class III	Mounting Magnetic track
Finishes Black		


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
TR0110	26 W	48 V DC	1800 lm	97 CRI	Ø60 × 200 mm	15° 24° 36° 50°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0110, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0110, 26 W, 15° beam

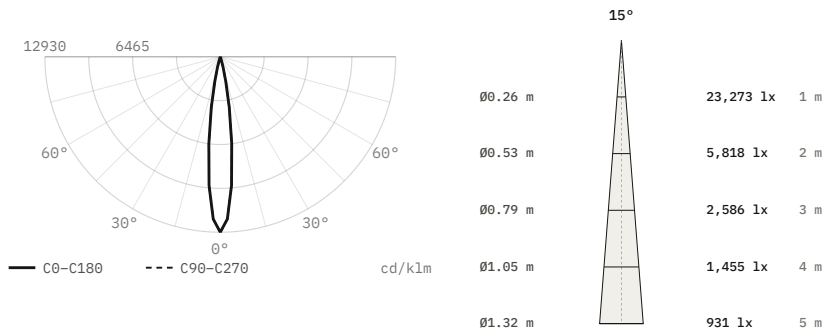


Luminous flux	1,800 lm
Efficacy	69 lm/W
Peak intensity	23,273 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data

TR0110, 26 W, 24° beam

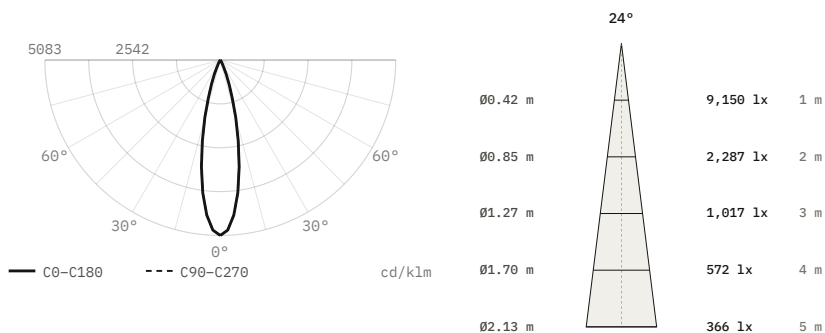


Luminous flux	1,800 lm
Efficacy	69 lm/W
Peak intensity	9,150 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data

TR0110, 26 W, 36° beam

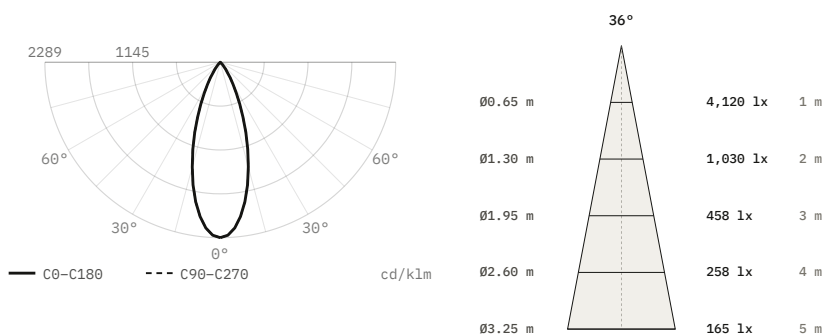

Luminous flux	1,800 lm
Efficacy	69 lm/W
Peak intensity	4,120 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data

TR0110, 26 W, 50° beam

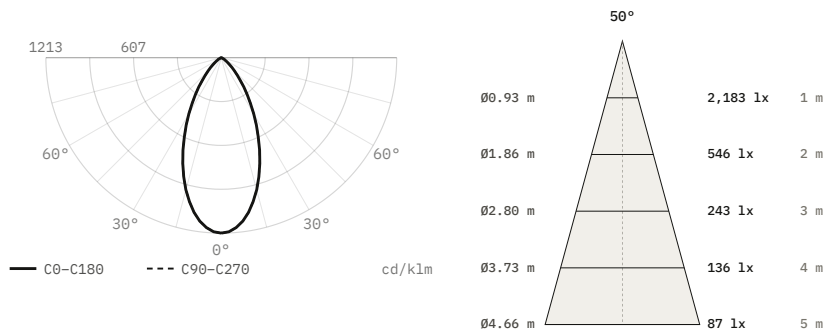

Luminous flux	1,800 lm
Efficacy	69 lm/W
Peak intensity	2,183 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0-30° / 30-60° / 60-90°	64.8 / 33.6 / 1.5 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.