Track spotlights

TR0196

Track spotlight

Track spotlight. 20 W. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **20 W**	Voltage **230 V AC**	Luminous flux **1600 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	IP rating **IP20**
Certifications **CE**	Mounting **Magnetic track**	Finishes **Black**

Models

Code	Version	Power	Voltage	Flux	CRI	Size
TR0196	15–60°	20 W	230 V AC	1600 lm	97 CRI	Ø60 × 178 mm; adapter L162 x W31 x H44 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0196, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0196, 20 W, wide distribution

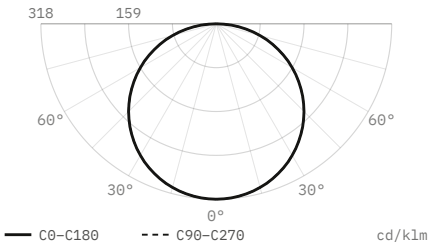

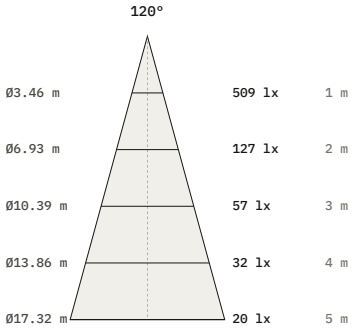

Luminous flux	1,600 lm
Efficacy	80 lm/W
Peak intensity	509 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	Ø60 × 178 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.