Outdoor

M22 Wall

Outdoor luminaire




Outdoor luminaire. 8 W. 2700, 3000, 4000 K. IP65. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
8 W	220–240 V AC	2700 K, 3000 K, 4000 K
CRI	**IP rating**	**Mounting**
97 CRI	IP65	Wall
Control	**Finishes**	
On/Off	White, Black, Silver, Brass, Bronze	

Dimensions

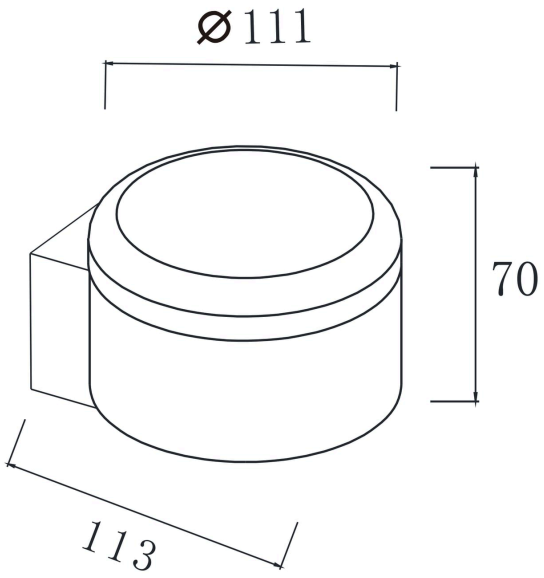


Models


Code	Power	Voltage	CRI	Size	Notes
WA-M22-1201	8 W	220–240 V AC	97 CRI	Ø111 × 70 mm, depth 113 mm	200 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WA-M22-1201, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

WA-M22-1201, 8 W, wide distribution

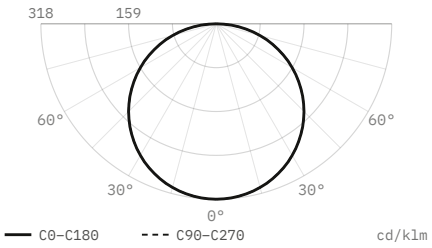

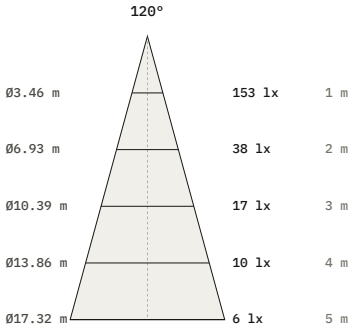

Luminous flux	**480 lm**
Efficacy	**60 lm/W**
Peak intensity	**153 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**Ø111 × 70 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.