Suspended

Zoom PH0062

Pendant

Pendant. 7 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø76 mm
- LED source: Citizen

Power **7 W**	Voltage **max 19 V**	Luminous flux **640 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed, Surface, Suspended**
Finishes **Black**		

Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
PH0062	7 W	max 19 V	640 lm	97 CRI	Ø90 x H75 mm	Ø76 mm	15° 24° 36° 50°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0062, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

PH0062, 7 W, 15° beam

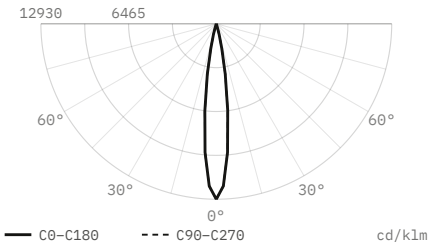

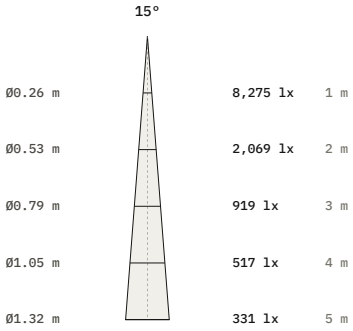

Luminous flux	640 lm
Efficacy	91 lm/W
Peak intensity	8,275 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø90 × 75 mm
Data	Calculated from catalogue data

PH0062, 7 W, 24° beam

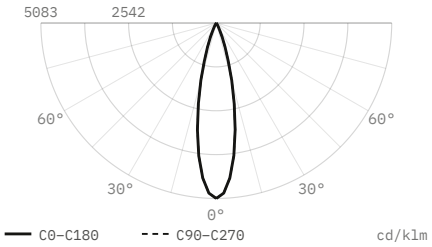

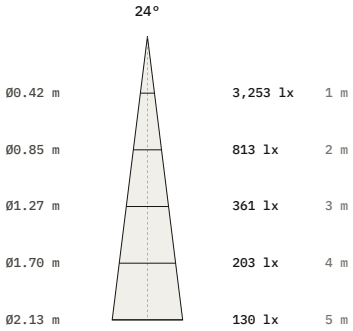

Luminous flux	640 lm
Efficacy	91 lm/W
Peak intensity	3,253 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø90 × 75 mm
Data	Calculated from catalogue data

PH0062, 7 W, 36° beam

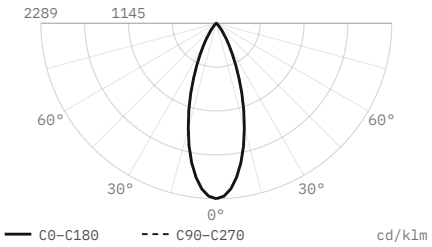

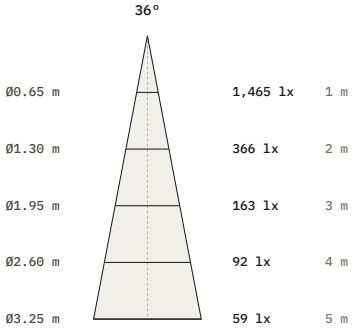

Luminous flux	640 lm
Efficacy	91 lm/W
Peak intensity	1,465 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø90 × 75 mm
Data	Calculated from catalogue data

PH0062, 7 W, 50° beam

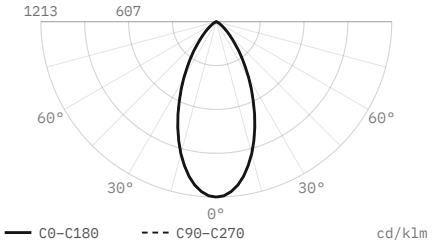

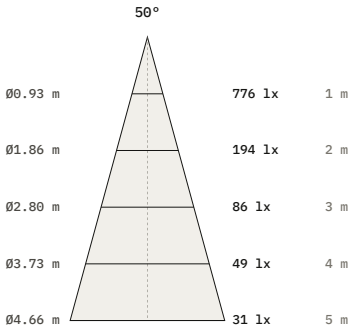

Luminous flux	640 lm
Efficacy	91 lm/W
Peak intensity	776 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø90 × 75 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.